



FEATURE ARTICLE

10.1029/2019JF005201



Key Points:

- The predictive capacity of morphodynamic models needs to improve to better anticipate global change impacts on deltas
- Information theory and dynamical system theory offer complementary analysis frameworks to improve understanding of delta resilience
- The sediment balance in a delta channel network needs to be closed such that predictions match with independent observations

Correspondence to:

A. J. F. Hoitink,
Ton.Hoitink@wur.nl

Citation:

Hoitink, A. J. F., Nittrouer, J. A., Passalacqua, P., Shaw, J. B., Langendoen, E. J., Huismans, Y., & van Maren, D. S. (2020). Resilience of river deltas in the Anthropocene. *Journal of Geophysical Research: Earth Surface*, 125, e2019JF005201. <https://doi.org/10.1029/2019JF005201>

Received 28 SEP 2019

Accepted 24 FEB 2020

Accepted article online 3 MAR 2020

©2020. American Geophysical Union.
All Rights Reserved.

This is an open access article under the terms of the Creative Commons Attribution License, which permits use, distribution and reproduction in any medium, provided the original work is properly cited.

Resilience of River Deltas in the Anthropocene

A. J. F. Hoitink¹ , J. A. Nittrouer² , P. Passalacqua³ , J. B. Shaw⁴ , E. J. Langendoen⁵ , Y. Huismans⁶, and D. S. van Maren⁶

¹Department of Environmental Sciences, Wageningen University and Research, Wageningen, The Netherlands,

²Department of Earth, Environmental and Planetary Sciences, Rice University, Houston, TX, USA, ³Department of Civil, Architectural and Environmental Engineering, University of Texas at Austin, Austin, TX, USA, ⁴Department of Geosciences, University of Arkansas, Fayetteville, AR, USA, ⁵National Sedimentation Laboratory, U.S. Department of Agriculture, Oxford, MS, USA, ⁶Deltas, Delft, The Netherlands

Abstract At a global scale, delta morphologies are subject to rapid change as a result of direct and indirect effects of human activity. This jeopardizes the ecosystem services of deltas, including protection against flood hazards, facilitation of navigation, and biodiversity. Direct manifestations of delta morphological instability include river bank failure, which may lead to avulsion, persistent channel incision or aggregation, and a change of the sedimentary regime to hyperturbid conditions. Notwithstanding the in-depth knowledge developed over the past decades about those topics, existing understanding is fragmented, and the predictive capacity of morphodynamic models is limited. The advancement of potential resilience analysis tools may proceed from improved models, continuous observations, and the application of novel analysis techniques. Progress will benefit from synergy between approaches. Empirical and numerical models are built using field observations, and, in turn, model simulations can inform observationists about where to measure. Information theory offers a systematic approach to test the realism of alternative model concepts. Once the key mechanism responsible for a morphodynamic instability phenomenon is understood, concepts from dynamic system theory can be employed to develop early warning indicators. In the development of reliable tools to design resilient deltas, one of the first challenges is to close the sediment balance at multiple scales, such that morphodynamic model predictions match with fully independent measurements. Such a high ambition level is rarely adopted and is urgently needed to address the ongoing global changes causing sea level rise and reduced sediment input by reservoir building.

1. Introduction

River deltas are hot spots for economic development, wetland biodiversity, and agriculture. Many of the world's megacities are located in deltas (Syvitski & Saito, 2007), related to harbor activity, fishing, and the fertility of coastal land. High population densities put deltas under pressure and lead to reshaping of the sedimentary environment (S. Wilson & Fischetti, 2010; Zhang et al., 2015). Under natural circumstances, delta dynamics are primarily governed by riverine sediment supply and subsequent tidal and wave-driven reworking, controlled over larger time scales by fluctuations in mean sea level and sediment supply. Human activity disrupts these natural dynamics; building of reservoirs in river catchments, for example, has caused many deltas to become sediment starved (Kondolf et al., 2014; Kummur et al., 2010; Schmitt et al., 2017; Syvitski et al., 2005). While compromising between alternative land use types, delta planforms have increasingly become fixed by embankments (engineered levees) for reasons of land reclamation and flood prevention (Giosan et al., 2013). The embankment obstructs the processes of aggradation that could compensate for subsidence within the embanked interchannel areas (Nittrouer et al., 2012), which has been identified as a major factor determining flood vulnerability (Syvitski et al., 2009).

Whether constrained by embankment or not, delta distributary channels typically terminate in mouth bar complexes, where depths are small (Fagherazzi et al., 2015). Fairways crossing these mouth bars require regular dredging to prevent rapid accretion (e.g., Fan et al., 2006). The relatively deep navigation channels convey a comparatively large share of the river discharge and amplify the tidal motion in the delta channel network. Typically, this leads to import of marine sediment and a reduction of the channel width (Nienhuis et al., 2018). Fine sediment tends to accumulate in deep navigation channels, causing a gradual increase of

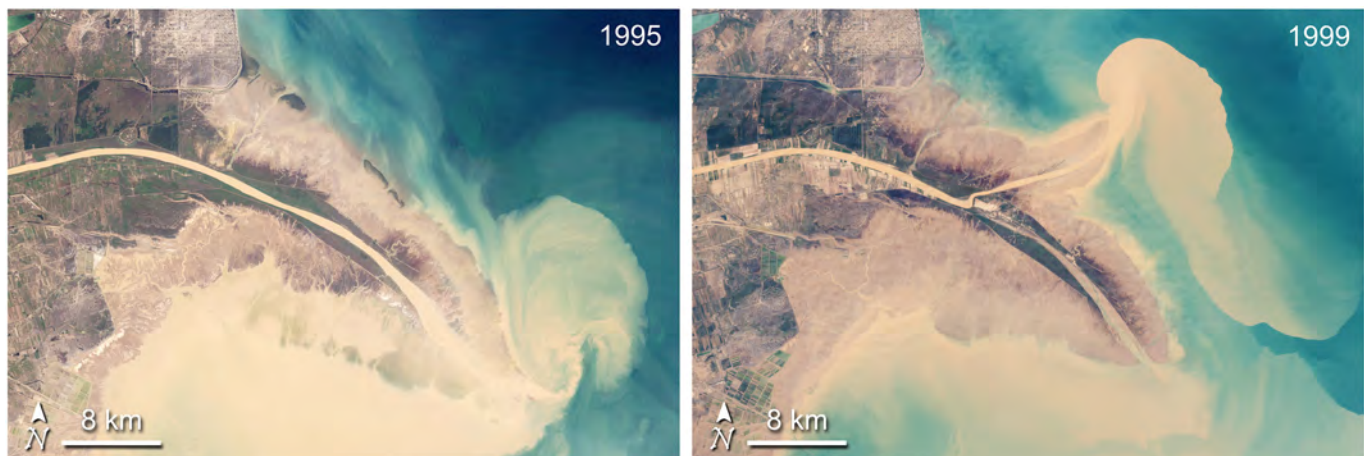


Figure 1. Scientific understanding about the natural process of avulsion has laid the basis for large-scale human interventions. In the Yellow River Delta, illustrated here, a human-induced avulsion occurred between 1995 and 1999. Image courtesy: NASA Earth Observatory.

suspended-sediment concentrations. The dredging volumes needed to guarantee sufficient navigation depth can become excessive (De Vriend et al., 2011), which may be traced back to a variety of physical processes including tidal pumping of sediment (Allen et al., 1980) and density-driven circulations (Hansen & Rattray, 1966).

Whereas distributary channels inside the delta tend to accrete, delta shorelines of sediment starved deltas show retreat, marking a transition from progradation to erosion such as in the Nile Delta (Stanley & Warne, 1993), the Mississippi Delta (Couvillion et al., 2017), the Ebro Delta (Sanchez-Arcilla et al., 1998), and the Yellow River Delta (Chu et al., 2006). Urban expansion in deltas causes sand to be a valuable resource, up to the point that the entire sediment input to the delta is extracted and used for the foundation of infrastructure and building material, such as in the Pearl River Delta (Luo et al., 2007; Zhang et al., 2015). Coastal protection works may arrest the shoreline retreat, but the impacts of sediment depletion may eventually become apparent inside the delta channel network as scour. In deltas with a heterogeneous subsoil lithology, erosion processes lead to the emergence of deep pits in the channel beds, putting the protected embankments at risk (Sloff et al., 2013). Unprotected earthen dikes, such as in the Ganges-Brahmaputra delta, can directly fail as a result of flow reorganization triggered by human modifications (Bain et al., 2019).

Considering that sea level rise, sand depletion, groundwater pumping, and human pressure on delta land are expected to increase, conventional approaches to control delta landscapes may become unsustainable (e.g., Schmitt et al., 2017). River embankments require progressively higher maintenance efforts, as the delta land behind the embankment subsides. Storm surge barriers cannot be easily adjusted to keep up with the rising sea level. Awareness has grown that in a long-term perspective, hard and inflexible infrastructure in deltas may be inefficient, which motivates the quest for sustainable, nature-based solutions to relieve the pressure on deltas (Temmerman & Kirwan, 2015; Tessler et al., 2015). The development of nature-based solutions, in turn, requires in-depth knowledge about the way in which deltas have gained flood resilience in the geological past (Hoitink et al., 2017; Paola et al., 2011) and about the potential triggers that may force part of the delta to another stable state. This can be illustrated with the case of the Yellow River Delta (Figure 1), where an uncontrolled rerouting of the river is prevented using knowledge about avulsion (Moodie et al., 2019).

In this contribution, we set out to introduce grand challenges that need to be overcome before delta resilience can be fully understood and eventually quantified. We define a delta morphodynamic system to be resilient when it has the capacity to recover from an extreme forcing at one of its boundaries and is largely self-sustaining (i.e., not in need of high maintenance). In this context, extreme forcing includes peak river discharges and storm surges. Accordingly, a delta may be considered resilient when after an extreme river discharge event or a storm surge, morphodynamical processes quickly reverse the temporary impacts on the delta morphology, autonomously. A more resilient delta returns more closely to the morphology it had prior to the event, which is dependent on general wave climate, discharge dynamics, tidal regime, and the sedimentary and biotic characteristics.



Figure 2. Catastrophic dike breaches such as near the city of Bommel in the Netherlands (1799) are engraved into the memories of communities living in river landscapes. Drawing by Christiaan Josi, 1802. Image courtesy: Rijksmuseum Amsterdam.

We focus on emerging processes that are notoriously difficult or costly to reverse and that are specific to deltas as opposed to coastal plains in general. Within this focus area, four key manifestations of delta instability in an anthropocentric context can be identified: river bank failure, persistent channel incision or siltation, avulsion, and regime change to hyperturbidity. Each of those four processes occurs both in natural deltas and in human-modified deltas. They represent poorly reversible, or even irreversible transformations of the morphodynamic system, at least at the time scale of decades. Both natural and human-modified deltas have variable degrees of resilience and are subject to study herein. It is our intention to address the weaknesses in current approaches that aim to analyze and quantify delta resilience and to propose promising analysis tools that may help to improve the predictive power of various types of models. Considering sea level rise, an improved capacity to predict delta stability is urgently needed.

In section 2, we discuss the knowledge gaps for each of the four selected manifestations of delta instability. In section 3, potential analysis tools are evaluated that can be employed to anticipate and prevent the uncontrolled state changes described in section 2. Such tools allow researchers and practitioners to quantify resilience and to identify early warning indicators. Section 4 discusses the key challenges that need to be overcome when applying new analysis tools discussed in section 3.

2. Manifestations of Delta Instability

2.1. River Bank Failure

Failure of river banks may cause catastrophes that are well documented in the memories of communities living in coastal lowlands (Figure 2). Although the rate of change of channel planforms generally reduces toward the coast (e.g., Hoitink et al., 2017), bank retreat rates of distributary channels can be significant. For example, Pilarczyk (2004) reported retreat rates of up to 20 m/a on the Mekong River Delta, while Walker et al. (1987) observed retreat rates as large as 11 m/a in the Colville River Delta. Bank erosion is a natural process and most commonly occurs at cut banks of meandering rivers during long-term, gradual adjustment of river planform. Pervasive bank erosion is therefore used as an indicator of channel instability, such as persistent channel incision or siltation (e.g., Schumm et al., 1984), or a precursor of avulsion. River bank retreat is primarily caused by two erosional processes: surface erosion (also termed hydraulic or fluvial erosion) and gravity-induced mass failures or bank collapses (e.g., Langendoen & Simon, 2008). Surface erosion occurs when the forces exerted by surface and groundwater flows exceed the erosion resistance of the bank soils. Stream bank mass failure occurs when the gravitational force, that is the weight of the failing bank, exceeds the shear strength of the bank materials (Thorne et al., 1998a, 1998b; Lawler, 1993; Thorne, 1982). The overall erosion resistance and shear strength of bank soils is affected by soil physical and chemical properties, soil

Table 1
Summary of Major Research Needs Identified by Papanicolaou et al. (2006)

<i>Preparatory</i>	
Experimental quantification of the effects of subaerial processes on the reduction of erodibility and shear strength parameters	**
<i>Surface Erosion</i>	
Generalized formulation of erosion rate for both cohesive and cohesionless materials	**
Model for soil detachment or erodibility coefficient of cohesive materials and cemented cohesionless materials	**
Measurement techniques for erodibility coefficient	*
Improved calculation of local applied hydraulic shear stress that accounts for turbulence, 3-D effects, vegetation, etc.	*
Effects of vegetation on erosion-resistance parameters	*
<i>Bank mass failure</i>	
Effects of soil water dynamics on soil shear strength: seepage forces, liquefaction, etc.	*
Longitudinal extent and shape of bank failure	**
Break up and fate of collapsing bank material	**
Root reinforcement provide by both fine (<1 cm) and coarse (>1 cm) roots	*
Extending the assessed failure types beyond simple cantilever or planar failure types	*
Combining multidimensional computer models of free surface hydrodynamics, soil water dynamics, and slope stability	

Note. The asterisks after the research needs indicate the level of progress made at this time: **, no or very limited progress and *, some progress. The absence of an asterisk indicates major progress.

organics, soil water chemistry, pore water pressures, and the presence of riparian vegetation. Some authors consider subaerial weathering of bank material as a third erosional process or agent (Couper & Maddock, 2001). However, it is typically seen as a preparatory process that makes bank material more susceptible to surface erosion or mass failure.

Papanicolaou et al. (2006) identified key areas in need of further research for the above processes (Table 1), which are similar to those described by Rinaldi and Nardi (2013). At present, limited progress has been made to address these needs. Improvements in high-resolution measurement techniques have resulted in improved quantification of flow resistance provided by bank roughness in general (Konsoer, 2014; Leyland et al., 2015) and by vegetation specifically (e.g., Aberle & Järvelä, 2013; Hopkinson & Wynn, 2009; Nepf, 2012). Unfortunately, these advances have not led to generalized formulations of bank erodibility and surface erosion rates. Soil erodibility is controlled by a multiplicity of soil and soil water physical and chemical properties with varying impacts that make soil erodibility highly variable in space and time, and therefore site specific (Konsoer et al., 2016), which may prohibit the establishment of a universal model. Because of this complexity, research on the lateral dynamics of distributary channels has mainly focused on quantifying the effects of fluvial and tidal hydrodynamics (e.g., Lentsch et al., 2018). However, Motta et al. (2012) showed that floodplain soil erodibility could exert a greater influence on river planform geometry and dynamics than the hydrodynamic processes.

Coupled monitoring of river hydrodynamics and bank erosion (Klösch et al., 2015; Luppi et al., 2009) and the increasing use of computational models that include more processes at smaller scales (Darby et al., 2007; Langendoen et al., 2016) have enhanced our understanding of bank failure processes and their controls. However, the longitudinal (or three-dimensional) extent of a bank failure event and its ensuing impact on reach-scale channel morphodynamics are not taken into account (Klösch et al., 2009). The three-dimensional shape of a bank failure, hydrodynamics at time of failure, and bank soil strength including effects of vegetation largely determine the size distribution and location of failure blocks. Failure blocks are thought to limit long-term bank erosion (Parker et al., 2011; Wood et al., 2001), but they can deflect the flow onto the bank thereby enhancing bank erosion (Hackney et al., 2015). The role of failure blocks is thus ambiguous.

Leyland et al. (2015) showed that bank roughness coevolves with erosion, possibly limiting bank retreat rates. Understanding this process is further complicated by the wide range in spatial scales of the bank roughness components (Konsoer et al., 2017), which form at different time scales, and the heterogeneity of bank material. The multiplicity of length and time scales in bank erosion (Couper, 2004) has not been

adequately resolved to quantify streambank erosion at scales beyond the reach scale. A shift from deterministic to probabilistic approaches may be needed to more accurately predict long-term bank erosion at reach scales. Furthermore, morphodynamic models do not adequately represent feedback mechanisms between vertical and lateral channel adjustment. Vertical growth of bars and islands steer flow onto the opposing bank, thereby increasing bank erosion rates resulting in changes in channel planform, such as channel sinuosity and bifurcation asymmetry, which controls distributary channel network growth (Shaw & Mohrig, 2014). Physically based simulation of bank erosion mechanics in multidimensional morphodynamic models is complicated as the bank steepness cannot be represented on the mesh given the horizontal size of deltas, necessitating subgrid-scale models of bank geometry and erosion mechanics (Langendoen et al., 2016).

2.2. Avulsion

River-channel avulsions are characterized by rapid channel relocations (i.e., jumping), rather than gradual migration (Slingerland & Smith, 2004). They have been studied extensively in modern environments, using physical experiments, and in the ancient rock record (e.g., Kraus, 1996; Mohrig et al., 2000; Reitz et al., 2010). Channel avulsions are driven by in-channel aggradation that forces the flow out of the channel, as well as through erosion of the river levee induced by overland flow during floods, which generates crevasse splays (e.g. Edmonds & Slingerland, 2009; Hajek et al., 2012). These operations may occur mutually or independently.

Fluvial-deltaic landscapes are heavily relied upon for societal welfare (Vörösmarty et al., 2009) and as such deltaic avulsions (particularly those that are unintended/unpredicted) can profoundly affect people. Numerous engineering practices and scientific studies have been leveraged to better understand avulsions and constrain their mechanics. Efforts have sought to limit the occurrence of natural avulsions; however, deltas inherently grow and maintain through the periodic relocation of the fluvial depocenter, which provides sediment, water, and nutrients to sustain coastal landscapes. Hence, an important scientific forefront is identifying a balance between protecting infrastructure located on deltas while continuing to nourish these delicate landscapes. This goal requires physically based models to better predict and understand avulsions, and the research is motivated by a need to inform a wide-range of scientific communities that aim to sustain deltaic coastlines.

Deltaic avulsions arise over a variety of scales: lobe-building avulsions are periodic and occur near the transition from normal to backwater hydrodynamic flow conditions (Jerolmack, 2009). Here, a decline in water-surface slope lowers sediment transport capacity, resulting in sediment accumulation to the channel bed (Nittrouer, 2013). The location for this occurrence is estimated using a backwater length-scale approximation: $L_b = H/S$, where H is the characteristic flow depth and S is the along-stream slope of the system (Paola & Mohrig, 1996). The characteristic time scale for this type of channel avulsion is estimated as the quotient of the channel depth and rate of channel bed aggradation (Jerolmack & Mohrig, 2007). While this provides a first-order approximation for most deltaic systems, recent investigations have demonstrated that the avulsion time scale is better characterized as half of the channel depth (Ganti et al., 2014; Moodie et al., 2019); in essence, channels do not completely fill with sediment before avulsing. Meanwhile, splays, or incomplete avulsions, may arise during a single flood event. Bay fill avulsion events are essentially sustained splays (over multiple flood cycles), and distributary mouth bar avulsion events can occur at the distal end of fluvial channels entering the marine basin, and these are quite dynamic, particularly during floods (Fagherazzi et al., 2015).

It has been proposed that rivers maintain an avulsion “clock” (Chadwick et al., 2019), but the occurrence of avulsions is stochastic and, as such, difficult to predict. While lowland deltaic river systems typically avulse during major flood events, not every flood causes an avulsion. As an example, consider the Mississippi River delta, one of the most studied coastal deltas of the world. Avulsions in this river indeed constitute a threat to stable human habitation in deltas: This landform is occupied by approximately 1.5 million people, and the Port of Louisiana is one of the largest in the Western Hemisphere (in volume trade). As such, levees have been built to corral river flooding and prevent an avulsion. The time scale of avulsion for the Mississippi system, over the Holocene, is approximately every millennium. As the U.S. Army Corps of Engineers is keenly aware, the Mississippi River channel is due for an avulsion into the Atchafalaya distributary channel (Mossa, 2016), which can also be viewed as a river capture. Such a disturbance has been deemed unacceptable because of its potential impact on society, and so significant resources have been expended to install infrastructure to prevent this avulsion. Specifically, the Old River Control Structure, constructed in the 1960s

and modified onward for several decades, presently maintains a 70–30% split between the Mississippi and Atchafalaya Rivers (respectively). However, as a consequence of the design and operation of this diversion, the proportional volume of sediment necessary to maintain equilibrium transport conditions is not properly allocated between the two subordinate channels, and so over the past several decades, the mainstem Mississippi River has experienced significant sedimentation (Heath et al., 2015). Ironically, over time, the Old River Control Structure is rendering the system even more susceptible to natural failure by shortening its avulsion time scale.

This lesson offers insight into a conundrum of fluvial-deltaic science, particularly as applied to societal sustainability: As a consequence of the nonlinear relationships that exist between water discharge, boundary shear stress, and sediment transport, it is challenging to partition water at a bifurcation and expect the transport capacities between the two subordinate channels to match the main stem (i.e., the sum of the parts often does not match the total). Hence, sediment deposition may arise at channel bifurcations (Dong et al., 2016). In turn, engineering a bifurcation (e.g., the Old River Control Structure) proves complicated, because it necessitates extracting bed material sediment (the fraction of sediment most susceptible to variable boundary stress conditions) and water at controlled ratios. This is difficult, however, because bed material is in highest concentration in proximity to the channel bed and so appropriately partitioning this sediment necessitates building deep diversions (Kenney et al., 2013).

As was postulated by Edmonds and Slingerland (2008), asymmetrical apportioning of water at a delta bifurcation (i.e., to maintain stability) approaches stability at approximately a 60–40% split, and this ratio could help maintain morphodynamic stability at a delta bifurcation. However, as delta systems in nature possess a wide range of bifurcation orders, and as a universal theory for bifurcation order for a given deltaic system remains elusive, there still exists uncertainty about the extent to which engineering delta bifurcations (i.e., for the sake of nourishing coastlines) can maintain equilibrium transport conditions and maximize water and sediment distribution to the coast.

2.3. Persistent Channel Incision or Siltation

Processes of persistent channel incision and siltation in alluvial channels have long been studied to better understand landscape evolution, where the coastal connection is typically represented as a constant or slowly varying mean sea level (e.g., Pritchard et al., 2009). The stability of channel beds in delta areas is complicated by the tidal motion and other causes of sea level fluctuations, forcing the surface level in the region where alluvial sediment reaches the coast. This triggers backwater and drawdown conditions of the mean water-level profiles (Chatanantavet et al., 2012), which are influenced by the tides (Kästner et al., 2019). Recent studies have addressed the equilibrium of longitudinal profiles of tide-influenced fluvial channels based on one-dimensional models, assuming uniform sediment and neglecting the effects of density differences imposed by the freshwater-saltwater interface (Bolla Pittaluga et al., 2015; Canestrelli et al., 2014; Guo et al., 2014). Generic understanding of bed-level profiles in tide-influenced delta channel networks is largely limited to those idealized conditions. The long-term consequences of changes in river discharge regime, reduced sediment supply, sea level rise, infrastructure, and subsidence are therefore uncertain. It is unclear toward which new state a real world delta channel that shows persistent channel incision or siltation will develop. Hereafter, we briefly review examples from the Ganges-Brahmaputra-Meghna Delta and the Rhine-Meuse Delta, illustrating how a myriad of factors complicates disentangling causes and effects.

Starting in the 1960s, about 5,000 km² of tidal delta plain in the Ganges-Brahmaputra-Meghna Delta in Bangladesh has been embanked for agricultural use (Wilson et al., 2017), resulting in a vast poldered area which neighbors the near-pristine Sundarbans to the north. The construction of the embankments has caused widespread sedimentation and channel infilling (Addams Williams, 1919; Alam, 1996; Mahalanobis, 1927; Mukerjee, 1938). The presence of polders has led to an amplification of the tidal range inland and has immediately affected the connectivity of the tidal delta plain, by cutting off more than 1,000 km of tidal creeks once responsible for connecting the islands to the main tidal channels (Pethick & Orford, 2013). The presence of the embankments and their alterations to the hydrodynamics of the tidal plain have resulted in the infilling of more than 600 km of channels, impacting navigation pathways in the area (Wilson et al., 2017). This has led to the creation of more than 90 km² of new land since the embankments have been built, land that is referred to as “Khas,” meaning “new” (Wilson et al., 2017). To arrest the infilling of channels, tidal river management strategies are being developed, which rely on temporary removal of an embankment to increase the volume of water moving in and out the adjacent tidal channel over a tidal cycle. Tidal

river management counteracts channel siltation and raises the polder level, which mitigates subsidence (van Staveren et al., 2017).

Similarly, the Rhine-Meuse Delta accommodates a branching channel network where human control over channel morphology has systematically increased over the past centuries, while sediment supply has dropped. The engineering measures include normalization, creation of new rivers, construction of a storm surge barrier, and deepening of the main navigation channel, which altogether overwhelm the effects of sea level rise on the mixed fluvial-tidal hydrodynamics and the associated morphodynamic developments (Vellinga et al., 2014). Harbors connected to the main navigation channel are efficient mud traps, where fine sediment originating from the rivers Rhine and Meuse accumulate (De Nijs et al., 2009). The storm surge barrier has closed off the main estuarine branch in the delta, whereas a subordinate channel has been incrementally deepened to facilitate shipping. The channels connecting the closed estuary and the shipping channel are subject to incision in a heterogeneous subsoil by strong tidal currents (Huisman et al., 2016; Sloff et al., 2013). Gaps in a poorly erodible top layer lead to deep scour holes, jeopardizing the embankment. The storm surge barrier is partly being reopened, albeit insufficiently to alleviate the problems of scour. Currently, the sediment capturing capacity of intertidal areas is gaining recognition, leading to small-scale “depoldering” projects (van der Deijl et al., 2019). Reopening of storm surge barriers and returning previously reclaimed land to the marine environment reveal a paradigm shift in delta management (Warner et al., 2018; Wesselink et al., 2015). The pragmatic approach to counteract problems of channel incision and siltation is in need of a stronger scientific substantiation.

2.4. Turbidity Regime Change

If the tendency for accretion is counteracted by dredging, instability of the sedimentary system may still manifest itself in the form of extremely high concentrations of suspended sediment. The resulting hyperconcentrated flow conditions and the associated layers of fluid mud covering channel beds (Talke et al., 2009) pose a serious threat to the ecology of modern estuaries and deltas. In general, channel deepening to accommodate larger ships is considered the main cause of such unfavorable conditions. Larger depths typically amplify the tidal range and enhance flood dominance, up to a tipping point for which the system undergoes a critical transition to a high-turbidity state (van Maren et al., 2015; Winterwerp & Wang, 2013; Winterwerp et al., 2013). This regime change is attributed to a positive feedback cycle between tidal amplification, flood dominance, mud accumulation, and reduced hydraulic drag caused by mud at the bed.

The state switch from moderate suspended-sediment concentrations to a hyperconcentrated state is critically dependent on the threshold for erosion, whereas there is no consensus on the best theoretical description of erosion (Mehta, 2013; Sanford & Maa, 2001). Hyperconcentrated flow may occur if this threshold is persistently exceeded and supply-limited conditions are prevalent (Dijkstra et al., 2018). The possible switch to hyperturbidity thus depends on two conditions: the availability of fine-grained material and the exceedance of the threshold for erosion. Either a change in hydrodynamics, such as tidal amplification by channel deepening (Winterwerp & Wang, 2013; Winterwerp et al., 2013), or an increase in the supply of fine-grained material, or a combination of the two, can trigger the regime change. The regime transitions between the two states show hysteresis, which can be attributed to hindered settling (Dijkstra et al., 2018). Once that a sufficiently large amount of fine material has accumulated within the system, and hyperturbidity occurs, the high-concentration state maintains itself, because relatively weak flows are sufficient to keep the sediment in suspension. Switching back to the previous regime may require not only restoring the former shallow bathymetry but also the removal of much of the accumulated fine sediment.

The loss of intertidal area has the same qualitative effect as channel deepening and narrowing: enhanced flood dominance and reduction of the accommodation space where fine sediment can settle. Beyond this, little is known about how geometrical properties of intertidal areas control the propensity for attaining a possible tipping point where the system switches to hyperconcentrated flow conditions. Although the basic mechanism that leads to hyperturbidity recently has been captured in idealized models (Dijkstra et al., 2019, 2019b) and used to estimate the propensity for a regime shift (Dijkstra et al., 2019a), the predictive capacity of those tools is yet to be confirmed and may be limited by a large number of simplifications. There is a need to quantitatively explain how alternative geometrical configurations of channels with intertidal areas influence the critical transition between regular and hyperconcentrated flow conditions.

3. Potential Resilience Analysis Tools

3.1. Numerical Modeling of Deltas

A wide range of numerical modeling tools exist to analyze and predict the manifestations of delta instability discussed in the previous section. Simulation models have been proposed for all hydrodynamic, sedimentologic, biotic, and biogeochemical processes. The temporal and spatial scales resolved in those models are coupled: Relatively small scale processes such as bank failure, channel scour, and dredging operate on seasonal to yearly time scales, whereas avulsion and turbidity regime changes, which act over a larger region, occur on periods of years to centuries. The largest-scale delta developments such as delta lobe switching are regulated by boundary conditions fluctuating over time scales ranging from centuries to millennia. Within this spectrum, model approaches covering time scales up to hundreds of years are most directly relevant in the context of analyzing delta resilience.

Numerical models strongly vary in their degree of complexity. More complex models are less suitable for long-term simulations, because of the associated large computational effort and also because they are prone to error accumulation (Hajek et al., 2012). High-complexity models have traditionally been designed as engineering tools to investigate the short-term impacts of local interventions and may reveal the dominant sediment transport mechanisms in delta channel networks. They are increasingly used in an exploratory mode as well, combining complex formulations and nonlinear interactions with simplified geometries to investigate morphodynamic processes in rivers (van Maren, 2007; Schuurman et al., 2013), estuaries (Hibma et al., 2003; Marciano et al., 2005; Van der Wegen & Roelvink, 2008), or the dynamics of mouth bars (Nardin & Fagherazzi, 2012; Nardin et al., 2013; Mariotti & Fagherazzi, 2013).

Idealized models are specifically designed to focus on processes that are considered essential to describe a particular phenomenon under consideration (e.g., Kim et al., 2009; Schuttelaars et al., 2013). Such a phenomenon is described with mathematical equations that capture the response of specific processes to changes, such as channel deepening. Idealized models are fast and enable to study model responses to a broad domain of the parameter space; however, these models lack complex physics and topography. It is therefore not obvious to what extent schematized models truly mimic the natural system they represent. Reduced-complexity models are placed in between these process-based and idealized models and are based on rules designed to mimic physics. For example, DeltaRCM (Liang, Voller & Paola 2015; Liang, Geleynse, et al., 2015) has been used to quantify the response of delta systems to sea level rise (Liang, Van Dyk & Passalacqua 2016) and subsidence (Liang, Kim & Passalacqua 2016). In a similar fashion, the Coastal Evolution Model (Ashton et al., 2001) quantifies the response of the coast to waves. The majority of these model studies address abiotic processes only, but since the work of Temmerman et al. (2005), the important role of biology is increasingly accounted for (Fagherazzi et al., 2012).

Whether or not a model is appropriate to quantify delta resilience in terms of the capacity to recover from extreme events depends on the time scales related to the investigated changes (T_c) and the time scale at which the model attains dynamic equilibrium (T_e), which is referred to as the morphological spin-up time. Dynamic equilibrium is of minor relevance when $T_c \ll T_e$. The latter may often apply when investigating the short-term impact of direct human interventions such as sand extraction on tidal dynamics, allowing the use of high-complexity numerical models. Changes in natural systems, or long-term effects of external changes (often resulting from human interventions), are governed by time scales larger than the equilibrium time scales. Turbidity regime changes, as well as delta planform topology developments, typically respond at time scales $T_c \geq T_e$. Such processes can only be addressed with reduced-complexity or idealized models, forced with simplified initial and boundary conditions.

Reduced-complexity models resemble river deltas or estuaries in a qualitative sense, but their spatial resolution is typically too limited to implement local human interventions. Multiple human interventions are often carried out simultaneously, or at least within a period shorter than the morphological adaptation time scale T_e . For instance, in many deltas, the channels have been deepened, bends were straightened, intertidal areas have been reclaimed, and the discharge distribution is modified by upstream dams in a period spanning several decades, each of which may have morphological time scales of decades or more (depending on the system size). The fact that such interventions can only limitedly be quantified with equilibrium models (as these lack the required spatial resolution), and often operate together, complicates identifying causes and effects. The synthetic equilibrium morphologies generated by numerical models may strongly differ from

real-world topographies. The alternative, using realistic topography as a starting point in morphologic calculations, is hampered by the spin-up time, which may exceed the response period associated with an isolated intervention (T_c). Idealized models are in essence equilibrium models, and therefore, their response is not influenced by spin-up time. However, they suffer from the same drawback as reduced-complexity models. Their topography differs too much from reality to implement detailed measures, and they miss part of the physics, such that the applicability is uncertain.

The morphological imprints of an extreme event can be widespread (Lazarus & Goldstein, 2019) and depend on the detailed human interventions designed to counteract the negative effects of extremes. To date, state-of-the-art high-complexity numerical models are mainly used to analyze flood resilience based on hydrodynamic simulations, without resolving morphological developments (e.g., Islam et al., 2019; Ferrari et al., 2020). The use of flexible meshes, in which the resolution is high in a focus area and low in the rest of the delta, has the potential to adopt a hybrid approach in morphodynamic modeling, to bridge the gap between local processes such as a dike breach and the delta-scale effects on delta morphology. Other promising developments include increased data availability and improved data quality, which may reduce the spin-up time by enhancing the agreement between initial and boundary conditions and help validating all three types of models.

3.2. Use of Empirical Relations

The process-based modeling approaches described in section 3.1 are complemented by empirical studies that use field data from modern (and ancient) river systems, to constrain delta behavior. Deltas that have evolved over the past millennia may inform about delta resilience, as they experienced multiple extreme events. The famous tripartite delta classification diagram by Galloway (1975) distinguishes form and morphology of delta systems based on the influences of the fluvial system, delivering water and sediment to the delta, relative to the influences of tides and waves. With the accessibility of global remote sensing databases, the physical attributes of deltaic systems are becoming increasingly better quantified (Caldwell et al., 2019; Nienhuis et al., 2015, 2018; Syvitski et al., 2005; Syvitski & Saito, 2007). Empirical trends emerge that may serve to validate the outcomes of physical and numerical modeling experiments. In this regard, it is possible to use “space for time” substitution, insofar that at a given site it is possible to map a trajectory of future change by modifying particular boundary conditions (e.g., relative sea level rise [RSLR], temperature, and wave climate), using examples provided from other sites that maintain similar environmental conditions to render comparisons. Hence, by investigating a large empirical data set of deltas that are currently experiencing a set of predicted conditions, it is possible to estimate future change for a particular site in question.

Information from global remote sensing images adds to stratigraphic records, which have proven paramount in developing empirical relations to describe avulsion dynamics. For example, as described in section 2.2, field evidence indicates that the delta apex is set by the onset of backwater flow, where sedimentation facilitates avulsions (Chatanantavet et al., 2012; Jerolmack & Mohrig, 2007; Jerolmack, 2009). Despite the importance of the backwater length scale for deltas emerging from rivers over a range of sizes (laboratory to continental-scale), empirical evidence, bolstered by theoretical improvements, indicates that the location of the avulsion node varies by a factor of 3 (Ganti et al., 2016; Moodie et al., 2019; Shaw et al., 2016). This suggests that a zone rather than one particular spot is susceptible to avulsion.

Sediment transport and the associated bedform dynamics are key processes governing delta resilience that remain heavily reliant on empirical relations. Sediment transport algorithms typically require inputs for boundary shear stress, or grain shear stress (i.e., boundary stress adjusted for form drag), and critical shear stress of particle mobility, but are modified depending on size and scale of the system from which they were developed. These modifications typically emerge as “tuning parameters,” for example, exponents and coefficients that may be adjusted to match theory and measurements. Sometimes, forcing algorithms to fit an ensemble of data for which they may not have been expressly developed can lead to insight regarding system operations. An example is found for the Yellow River Delta (China), a large and lowland sand-bed system with high sediment concentration. The best tested semiempirically based total load equation developed to estimate bed material sediment discharge, the Engelund-Hansen sediment transport formula (Engelund & Hansen, 1967), under predicts sediment load for the Yellow River by a factor of 20 (Ma et al., 2017). Based on a compilation of data, Ma et al. (2020) introduced an alternative, universal relation for sediment transport

in fine-grained environments typically found in deltas. Predicting delta response to changes in boundary conditions implies predicting sediment transport rates, which is still a field where leaps forward can be made.

3.3. Continuous Observation

High-resolution, continuous monitoring allows direct observation of the hydrodynamic and morphodynamic responses to abrupt and gradual changes in boundary conditions. Modern monitoring is being accomplished through distributed networks of in situ sensors and through a variety of space-based remote sensing techniques. For example, a new approach to continuous monitoring of flow and discharge exploits measurements from a horizontal acoustic Doppler profiler, which can collect horizontal flow profiles across dynamic delta channels (Kästner et al., 2018; Sassi, Hoitink & Vermeulen 2011). A diverse array of sensors on satellites provide ways of sensing wetland land use, suspended-sediment, topography, and their changes in time (Klema, 2013; Xia, 1998). Such data sets have been important for recent analyses of water surface change and inundation patterns in delta systems (e.g., Besset et al., 2019; Brakenridge et al., 2013; Donchyts et al., 2016; Wagner et al., 2017), which contributes to an understanding of recovery after extreme events.

While spatial and temporal resolution of remote sensing platforms continues to improve, the resolutions and degree of precision depend on the environment. In particular, airborne remote sensing techniques are limited beneath the water surface in turbid conditions associated with river deltas. This is a persistent problem for shallow coastal and deltaic systems. Widespread use of light detection and ranging (lidar), structure from motion, and other techniques in terrestrial environments can produce high-resolution digital elevation models (DEMs) interpolated from over 1,000 measurements per square meter (Passalacqua et al., 2015). Lidar and multispectral techniques can also work well to measure bathymetric surfaces in clear-water systems, where it is possible to measure up to 70 m deep (e.g., Brock & Purkis, 2009; Wedding et al., 2008). However, because light passing through water is both attenuated as a function of water depth and color, and scattered by particles, measurements are limited to less than 6 m, where turbidity is affected by sediment concentrations of 0.2–9.0 mg/L (Gao, 2009). Considering that suspended-sediment concentrations in most delta systems regularly exceed 100 mg/L (Eidam et al., 2019; Buschman et al., 2012; Hale et al., 2019; Falcini et al., 2012; Walker & Hammack, 2000), optical sensing of the water-sediment interface in deltaic systems is rarely possible below a few decimeters. This limitation severely hinders the ability to detect rapid changes in shallow bathymetry, which can include erosion and deposition exceeding 1 m over a single flood or storm event (Jaramillo et al., 2009; Hale et al., 2014; Khan et al., 2013; Shaw & Mohrig, 2014).

The limitations of remotely sensing the subaqueous portion of deltas means that data must be collected through slow and costly boat-based surveys or autonomous water-borne vehicles. Multibeam echosounding is the current state of the art and can map the water-sediment interface at high resolution (Maloney et al., 2018; Nittrouer et al., 2011). While the resolution of multibeam bathymetry can approach that of lidar, data collection rates are orders of magnitude slower due to vessel speed limitations. Further, the utility of a multibeam system decreases as shallow water constrains its survey footprint. Surveying in very shallow regions is limited to single-beam sounding (Shaw & Mohrig, 2014) or walking RTK GPS campaigns (Eekhout et al., 2014; Olliver & Edmonds, 2017; Ritchie et al., 2018). Distributed networks of monitoring stations in coastal marshes, such as the Coastwide Reference Monitoring System in coastal Louisiana, are becoming an essential tool for monitoring wetland resilience and sustainability in many deltas (Auerbach et al., 2015; Hensel et al., 1999; Ibáñez et al., 2010; Jankowski et al., 2017). However, such networks have not yet been extended to the delta front or open bays, where bathymetric change can be far more rapid (Eidam et al., 2017; Ganju et al., 2017).

These practical limitations in resolution have important implications for coastal DEMs of river deltas, which ideally span the subaerial and subaqueous environments. Coastal DEMs integrate measurements collected with many different survey techniques with varying resolution and use data sets collected decades apart. The state-of-the-art U.S. Geological Survey CoNED DEM of the northern Gulf of Mexico (https://topotools.cr.usgs.gov/topobathy_viewer/dwnedata.htm) integrates measurements collected between 1880 and 2013. NOAA navigation charts show that it is generally the shallow coastal regions away from shipping lanes where decades-old measurements continue to be used (NOAA Chart 14852 and NOAA Chart 11351). The resolution is relatively weak in the shallow coastal zone below 0 m, yet this is precisely where significant bathymetric change should be expected. These topobathymetric DEMs form an essential boundary condition for many hydrodynamic models, including hurricane storm surge (Hope et al., 2013; Xing et al., 2017),

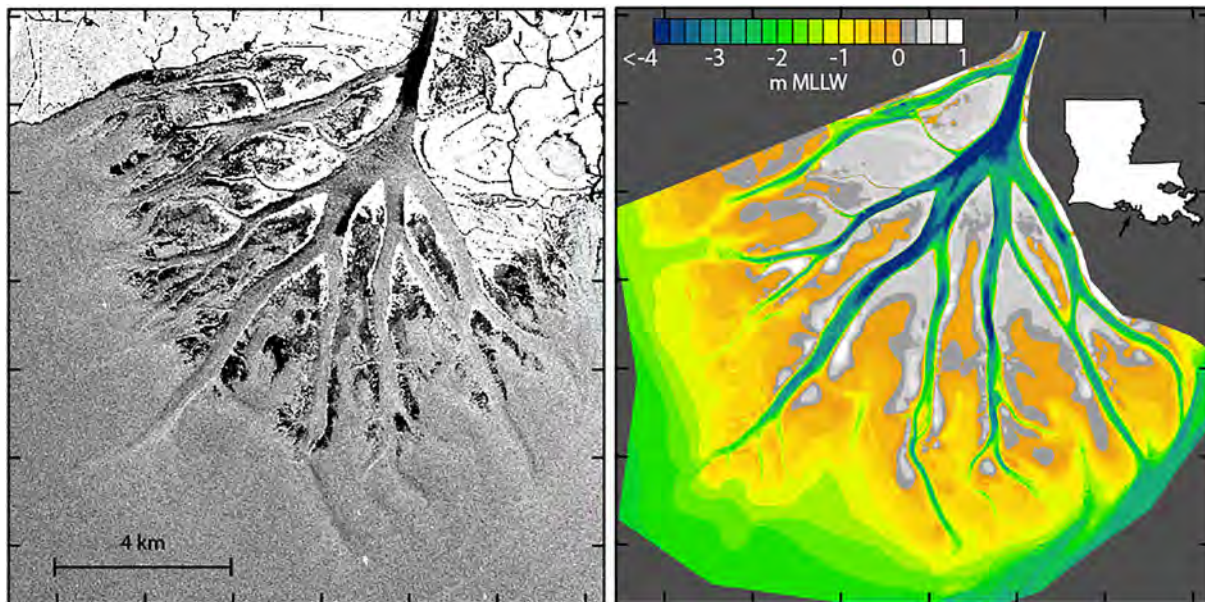


Figure 3. Airborne radar allows to monitor shallow bathymetry at high-resolution, complementing shipborne hydrographic surveys. (left) Image of Wax Lake Delta from an uninhabited aerial vehicle synthetic aperture radar (6 May 2015). (right) Corresponding image based on a single-beam sonar survey (February 2015). MLLW abbreviates Mean Lower Low Water. Adjusted from Shaw et al. (2016).

and flood and tidal modeling (Gaweesh & Meselhe, 2016; Vinh et al., 2014; Xie et al., 2017). While such models are validated to varying degrees, it is likely that modeling can be improved, particularly in very shallow regions, with improved DEMs.

The need for direct remote sensing of the water-sediment interface has been circumvented by several creative techniques that use knowledge of coastal hydrodynamics to obtain estimates of bathymetry based on water surface features. One well-established example of this involves using synthetic aperture radar backscatter to estimate shallow bathymetry. Although radar cannot penetrate water, radar backscatter can quantify water surface roughness (Alpers & Hennings, 1984; Alpers et al., 2004). Synthetic aperture radar can potentially resolve uneven bathymetry in turbid environments and has been used to detect large shallow marine sand banks (Fu & Holt, 1982; Hennings, 1998) and tidal bar features (Calkoen et al., 2001; Vogelzang, 1997). Videos of depth-limited breaking waves can be used to estimate subaqueous topography and evolution of the transition to high sediment concentrations (Harrison et al., 2017), and streaklines composed of thin films on the water surface allow the ability to map the flow direction field in aerial or satellite imagery (Shaw et al., 2016). By interpreting the divergence of the flow direction field, the location of subaqueous channel tips can be estimated from streaklines (Shaw et al., 2018). The resolution produced by these new techniques is low compared to direct altimetry, and ideal hydrodynamic conditions are required (Cathcart et al., 2020). Even so, the shallow coastal zone on river deltas is vast and difficult to measure, so the systematic use of these techniques has the potential to significantly improve coastal DEMs.

The extensive data sources from remote sensing increase the need for the development of automatic tools capable of extracting relevant information without or with limited user intervention. Most of the existing empirical studies discussed in section 3.2 focus on a few deltaic systems or require extensive manual operations. With the aid of machine learning techniques, and multiple sources of available data, the mapping of surface water change is now possible (Donchyts et al., 2016; Isikdogan et al., 2017; Pekel et al., 2016), and deltaic networks can be extracted from remotely sensed observations (Isikdogan et al., 2015, 2017, 2018; Jariel et al., 2019; Nienhuis et al., 2020). The automatic extraction of river networks in deltaic environments remains a challenge, but there are no inherent obstructions to developing such tools (Figure 3).

3.4. Information Theory

Whether it be modeling or observational data, the analysis strategy requires careful consideration. Processes in deltas are active over a wide range of spatial and temporal scales; couplings are usually nonlinear, thus challenging the use of classic statistical approaches such as linear correlation analyses (Passalacqua, 2017).

Yet quantifying these couplings is fundamental to understanding how deltas respond to gradual and abrupt changes in forcing. The manifestations of delta instability discussed in section 2 are no exception, as they will be the net outcome of multiple processes acting at various scales. Part of the solution to this issue is in linking causes and effects at their scales. As couplings are nonlinear, mathematical approaches such as network and graph theory and information theory are emerging as valuable approaches.

Network and graph theory are helpful to represent a system as complex as a delta as a set of links and nodes, whose connectivity is captured in the adjacency matrix. Recent work has quantified delta network complexity based on this approach (Tejedor et al., 2015a, 2015b), the signature of sediment composition on this complexity (Tejedor et al., 2016), and the signature of delta forming processes on network structure (Passalacqua et al., 2013). In the classical sense of sets of links and nodes, network representations may be too simple to capture how fluxes are transported through delta networks. Observations from the Wax Lake Delta in coastal Louisiana, for example, have shown that a large portion of the channel discharge is transferred to the island interiors via secondary channel and over levee flow (Hiatt & Passalacqua, 2015), thus suggesting that delta networks are leaky and the classic network model may not be always appropriate (Passalacqua, 2017). More complex network representations, such as a *multiplex* may help in this regard as they allow the representation of a system as a set of multiple networks in which links are allowed within each layer and between layers. This approach has been recently used to represent the transport of fluxes in channels and islands in delta systems (Tejedor et al., 2018).

Another helpful concept is that of entropy (Shannon, 1948), which is a measure of the uncertainty contained in a variable. A nonlocal entropy rate has been recently applied to modeled and natural deltas to quantify the self-organization of delta networks and to suggest an optimality principle behind it (Tejedor et al., 2017). Entropy is also the basis for information theory metrics, such as mutual information (MI) and transfer entropy, where information is defined as a reduction in uncertainty. In other words, knowledge of how a variable (or more than 1) reduces the uncertainty of another. MI is similar to the classic definition of correlation, although based on the probability density function of the variable rather than on the observations themselves. MI thus measures how synchronized variables are. Transfer entropy instead measures how knowledge of a variable and its past helps reduce uncertainty of another variable, by adding information that was not contained in the past of the variable itself.

A first application of these tools to deltaic environments is that of Sendrowski and Passalacqua (2017) for the analysis of water-level fluctuations on the Wax Lake Delta in coastal Louisiana in response to wind, discharge, and tides (Figure 4). The approach allows the quantification of process connectivity: viewing the variables as nodes of a network whose links are the couplings between these variables at a given scale or range of scales (Passalacqua, 2017). This operation is important in deltaic systems where a given change in water-level or another variable may be caused by different factors at different scales; for example, on the Wax Lake Delta, which maintains a microtidal regime, water-level fluctuations result from discharge, wind, and tide variability are on the order of decimeters and are often compounding, regardless of the cause (Geleynse et al., 2015). Through an analysis of process connectivity, it is possible to capture the response of water-level to each factor independently through time. Spatial differences can also be captured, with hydrologically connected locations in the delta (e.g., an island with secondary channels) responding at much faster scales than more hydrologically disconnected islands (e.g., islands with subaerial levees).

When applied to sediments, rather than water-level fluctuations, it is more likely that forcing factors may act simultaneously. Another available approach, still based on the same mathematics, is to separate the synchronous, redundant, and unique information from the MI, computed among sources and a sink. This approach has been successfully used with ecohydrology variables (Goodwell & Kumar, 2017a, 2017b). The main constraint for applying these tools is the requirement on the length of the time series (200–300 to 500 data points depending on the method used for computing the probability density function). Thus, there is a need for identifying areas experiencing change, for example, via remotely sensed observations, and then for focused collection of time series data for the quantification of couplings.

A great advantage of applying information theory statistics to observations is also validating numerical modeling results so as to guarantee that an answer is obtained for the right reason. Sendrowski et al. (2018) compared the couplings among water-level and forcing factors measured in the field to those measured from numerical modeling results obtained by running Delft3D under the same conditions as those experienced in nature. The results showed that, while the model was able to capture well the transport over channels,

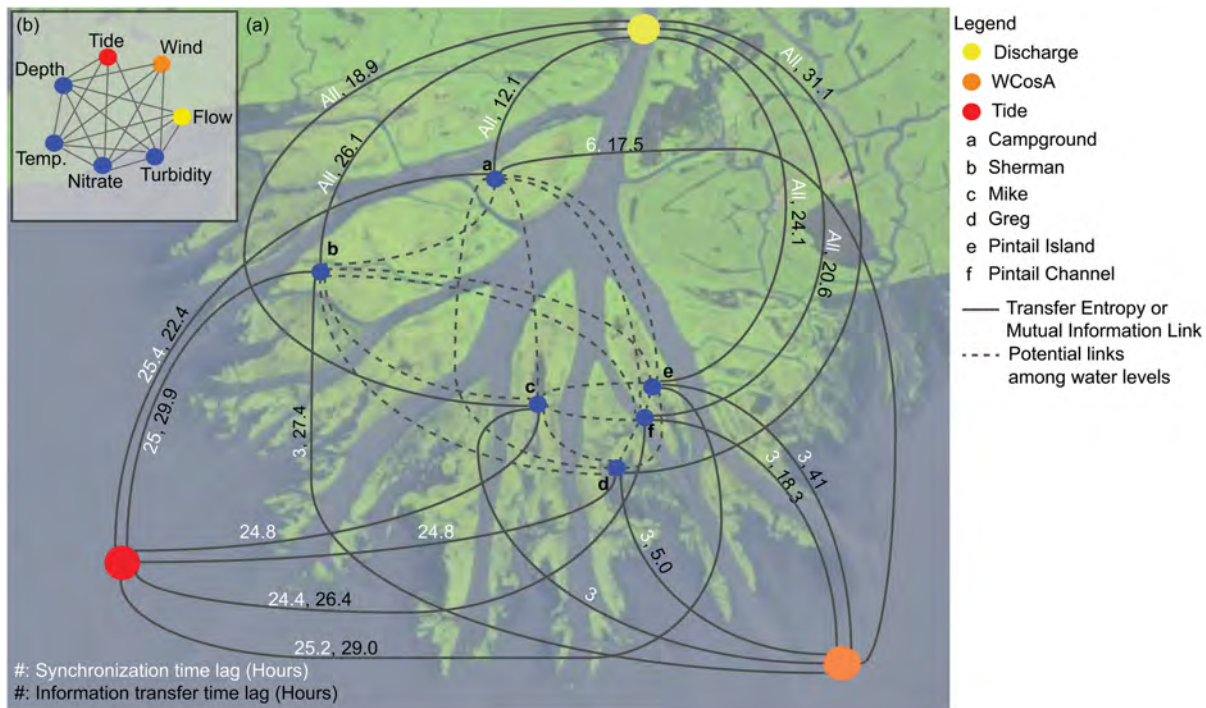


Figure 4. Connectivity of processes can be quantified from information theory applied to time series of key variables in a delta. Relationships are quantified in terms of the synchronization among variables (how much information they share) and their information transfer (how much one variable contributes information to the other). (a) Measured links among water level, discharge, wind, and tides at the Wax Lake Delta (LA, USA) from time series observations collected over three months. (b) Other possible connections of interest in deltas. Adjusted from Sendrowski and Passalacqua (2017).

the couplings with islands were not fully captured, particularly those related to small time scale wind speed fluctuations. The advantage of validating numerical modeling results based on couplings is that it is possible to quantify the capability of a model to capture the dynamics of a system under analysis, even if processes are missing, or its representation needs to be improved.

Additionally, once validated, numerical models can be used for measuring the effect of a disturbance (e.g., changes in incoming sediment input, and construction of embankments) by comparing the process network of a healthy system to that of a system under disturbance (quantified from synthetic data generated with the validated model). This analysis can provide information on which parts of the system would be most affected by the disturbance and at what scale. Similarly, an information theory analysis in combination with numerical modeling could be used to assess the predicted efficacy of a restoration design, by comparing the process network of the current system to that of the restored one.

3.5. Dynamic System Theory

Toward predicting the key manifestations of delta instability as described in section 2, a strong focus on thresholds is warranted. Thresholds beyond which a positive feedback mechanism comes into force are generally referred to as tipping points, which may lead to bank collapse, avulsion, persistent channel depth change, or hyperturbidity. Dynamic system theory (DST) is a generic scientific framework to analyze tipping points, broadly applied to explain resilience versus abrupt changes in nature and society (Scheffer, 2009). The use of concepts from DST in delta geomorphology has largely remained limited to studies focusing on self-organization (Coco & Murray, 2007; Fagherazzi, 2008; Rodriguez-Iturbe & Rinaldo, 2001) and biogeomorphology (Marani et al., 2010, 2013) but is rarely employed in its full extent.

In DST, regime shifts are known as catastrophic bifurcations, which can be illustrated by the classical theory of a fold catastrophe (Figure 5, Scheffer, 2009). The equilibrium state of a system can respond in different ways to a change in conditions (left hand panels). Systems can respond smoothly, as in panel (a), or abruptly, as in (b). Critical transitions occur if the equilibrium curve is folded (panel c). Three equilibria can then exist for a given condition. When the system is close to a bifurcation, as in F2, a subtle change may cause a large shift to the lower limb. Close to such a bifurcation, a perturbation can easily push the system across the

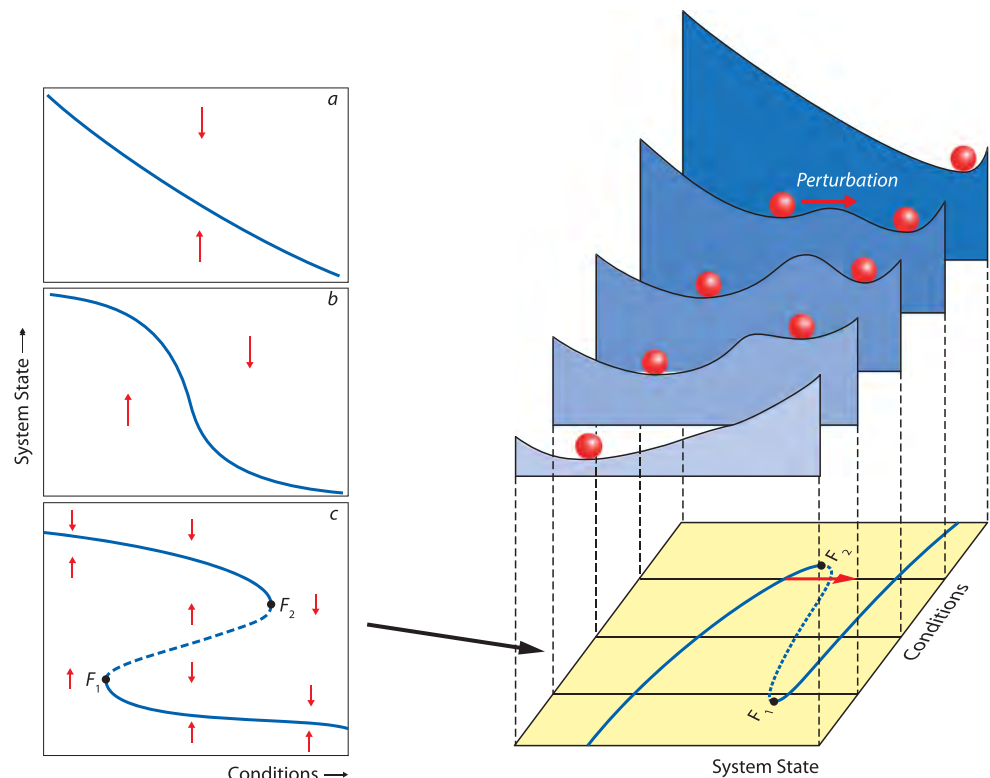


Figure 5. Regime shifts in deltas may be interpreted as critical transitions in a fold system. (a–c) Curves depict equilibrium conditions as a function of forcing conditions. If the curve is folded, as in (c), alternative equilibria exist for the same conditions. The arrows illustrate in which direction the system moves if it is not in equilibrium, showing all curves to be stable except for the dashed line in (c). The dashed line can be interpreted as the border between two basins of attraction, as illustrated in the right figure. Adopted from Scheffer (2009).

boundary between the attraction basins, as illustrated by the stability landscapes in the right-hand graph. These bifurcation points are tipping points where runaway change can produce a large transition in response to a perturbation, referred to as a critical transition. Over the past decades, it has become clear that there are multiple symptoms that announce if a critical transition is approaching. In a wide range of complex systems, the value of generic indicators has convincingly been demonstrated (Scheffer et al., 2009), which confirms that critical transitions are indeed related.

Prior to a regime change, the temporal dynamics in key variables typically changes, because the system is too far off from a stable state in which the system is resilient to perturbations. This leads to critical slowing down (Strogatz, 2018), which refers to a marginally stable situation for which rates of recovery are small. Slowing down tends to increase the autocorrelation in temporal patterns of fluctuations. In addition to an increased autocorrelation, the reduction in the rates of recovery manifests as an increase in the variance of fluctuations, which has been formally demonstrated. In marginally stable situations, perturbations are not anymore firmly attracted back to the stable state. The resulting increase in memory of a system can be quantified from wavelet analysis of time series characterizing the system, which will reveal the loss of resilience.

Next to indicators in time series that yield an early warning of critical transitions, there exist a variety of spatial indicators (Dai et al., 2013; Kéfi et al., 2014, 2007; Maestre & Escudero, 2009). The increased recovery time to local equilibrium after a perturbation leads to an increase of spatial coherence in the system. The spatial coherence, in turn, can be quantified from the cross correlation using various types of metrics. An associated type of indicator is based on changes in the characteristic shapes and sizes of patches in images (Rodriguez-Iturbe & Rinaldo, 2001). Close to a systemic transition, the increased coherence results in scale-invariant distributions of patch sizes and other metrics that parameterize patch shape. In systems

characterized by self-organized regular patterns, specific spatial patterns that can be recognized from an image may announce a critical transition.

The dynamic systems theory explained above offers a powerful framework to analyze the resilience of deltas. Delta channels are continuously exposed to a variable river discharge, which is a stochastic forcing that can be used to investigate the rates of recovery in turbidity regimes and channel morphology, even in the absence of direct observations during critical transitions. Long-term data series of hydrodynamic variables and turbidity can be used for this purpose, collected in regions where a regime shift may have occurred. Now that available idealized models are capable of simulating a turbidity regime change and the transition from a stable tidal channel to a channel that tends to silt up, it is possible to establish if these critical transitions are predictable from autocorrelation and cross-correlation metrics. Using the modeling results and satellite images for delta channels showing bank retreat, it is worth investigating if channel bank instability is preceded by changes in hydrodynamic fluctuations and flow coherence.

4. Grand Challenges

4.1. Closing the Sediment Balance on an Annual Time Scale

Several overarching challenges can be formulated that may steer the development of analysis tools as described in the previous section. A primary target is to gain confidence in the fluxes, sources, and sinks in the equation describing the sediment balance of a delta channel over an annual cycle and to quantify how low-impact-high-probability conditions compare to high-impact-low-probability events (e.g., Castagno et al., 2018). Such a comparison is crucial in analyzing delta resilience, as they inform about regime change thresholds. Typically, in situ collected data fail to cover the spatial and temporal resolution and accuracy necessary to explain morphodynamic changes from differences in estimated sediment transport rates. Even in the Rhine-Meuse Delta in The Netherlands, an example of an intensively monitored delta system, the data on sediment transport across the boundaries and sediment extraction by dredging are still insufficient to explain the sediment volume changes inferred from comprehensive, frequent, high-quality multibeam measurements.

Compared to alluvial environments where unimodal sediment prevails, deltas represent complex transitional environments with mixtures of sand, silt, clay, and organic material. Each of those fractions may contribute to the sediment balance, which is often simplified to a sand balance. For silt and clay, the degree in which deltas act as a filter remains difficult to quantify. The finer fractions not only contribute to the total sediment volume but may also impact sand transport and bed morphodynamics, indirectly affecting the sand budget of the delta. Models are typically calibrated to data within a confined calibration realm in which available data may be reproduced by the model through alternative model settings, which is referred to as equifinality (van Maren & Cronin, 2016). These different settings may lead to very different model behavior outside the calibration bounds and imply uncertainty about the sediment balance for various fractions.

Remote sensing has potential to help meeting the data demands, for example, with the upcoming National Aeronautics and Space Administration Surface Water and Ocean Topography mission that will provide water fluxes in channels larger than 100 m. This will allow establishing sediment balances at multiple scales, which may lead to contrasting insights. In the Ganges-Brahmaputra-Meghna Delta, for example, the large-scale system may be in balance, in the sense that sufficient sediment input is available to keep up with sea level rise. At the scale of individual channels, domains exist where channels are silting up, whereas in other domains incision occurs (Auerbach et al., 2015; Wilson et al., 2017). There is a need to quantify how much sediment is being transferred to the interior of islands via secondary channels, and flow over levees. Advances in continuous observations, outlined in section 3.3, provide new means of quantifying erosion, deposition, and associated sediment fluxes. Some field observations for shallow flow (<1 m) exist (Hiatt & Passalacqua, 2015), but this needs to be carried out over large spatial extents. The upcoming National Aeronautics and Space Administration NISAR mission will provide differences in water level over short windows of time, from which hydrological connectivity metrics may potentially be inferred.

Having acknowledged the potential of remote sensing, and satellite remote sensing specifically, in situ monitoring remains indispensable. With decreasing width-to-depth ratio of a channel, the flow and sediment dynamics becomes evermore three-dimensional in character, and suspended-sediment concentration at the surface becomes less strongly correlated to depth-averaged concentration. In situ observations of channel junctions remain crucial, as they exert a key control in partitioning sediment fluxes over the delta channel

network, and the flow and sediment partitioning processes are particularly complex (Buschman et al., 2010; Buschman et al., 2013; Kästner & Hoitink, 2019; Salter et al., 2018; Sassi, Hoitink, de Brye et al., 2011).

4.2. Impacts of Sea Level Rise and Reduced Sediment Supply

In parallel to setting up the sediment balance at an annual time scale, there is a need to address the delta mass balance over longer time periods, to anticipate the consequences of sea level rise and reduced sediment input to deltas as a result of reservoir building. At the centennial scale, river delta stability is often conceived as a simple volume balance comparing sediment accumulation (both mineral and organic) to the accommodation space produced by RSLR (eustatic sea level plus subsidence Blum & Roberts, 2009; Kim et al., 2009; C. Wilson & Goodbred, 2015). A function for equilibrium delta area A_d can be expressed as (Paola et al., 2011) follows:

$$A_d = \frac{kQ_s(1 + r_0)}{C_0(\sigma_c + RSLR_b)}, \quad (1)$$

where k is the fraction of sediment retained within a delta (trapping coefficient, dimensionless), Q_s is the mineral sediment discharge (L^3/T), r_0 is the volume ratio of organic to mineral sediment (dimensionless), C_0 is the sediment mass fraction of the deposit (1-porosity, dimensionless), σ_c is subsidence from variable sediment compaction (L/T), and $RSLR_b$ is delta-wide RSLR due to tectonic or isostatic subsidence plus eustatic sea level rise (L/T). When accommodation increases relative to accumulation, the land area near sea level (A_d) must diminish, as is currently predicted for many of the world's deltas (Anthony et al., 2015; Blum & Roberts, 2009; Erban et al., 2014). However, a closer look reveals three important feedbacks that influence this accounting. First, subsidence rates from compacting coastal deposits near the sediment surface, which are spatially and temporally variable, tend to dominate the eustatic sea level rise and delta-wide, deep-seated subsidence rates during the Holocene on the world's large deltas (Higgins et al., 2014; Jankowski et al., 2017; Rogers et al., 2013; Wolstencroft et al., 2014). Such compaction makes C_0 variable. Indeed, shallow river delta sediments range from well packed ($C_0 \sim 0.6$) to extremely diffuse ($C_0 \sim 0.1$). Hence, the behavior of coastal sediments may exert a primary control on delta morphodynamics through the rates, which they compact (Keogh & Törnqvist, 2019). A second feedback is that a significant fraction of sediment accumulation can be organic, which can make up 11–15% of the deposit for some large river deltas ($r_0 \sim 0.12$ – 0.18 Gouw, 2008; Holmquist et al., 2018). However, such organic deposition is understood to occur only when a delta is starved of mineral sediment but not fully inundated and abandoned (Bohacs & Suter, 1997; Kosters et al., 1987; Lorenzo-Trueba et al., 2012). Third, the trapping efficiency (k) of mineral sediment varies significantly depending on the delta morphology and characteristics of coastal plain (Nardin & Edmonds, 2014; Nardin et al., 2016; Nienhuis et al., 2018) and material properties of the unchannelized delta deposits (Straub et al., 2015).

It is a grand challenge to find new, physics-based empirical relations that account for the feedbacks in equation (1), because they are strong. A recent survey of areal change on 54 deltas over the last 30 years by Besset et al. (2019) found that losses in delta area have been rather small, considering the significant reduction in sediment supply, combined with sea level rise and sediment compaction, over the same time period. Based on a study of the morphology of nearly 11,000 coastal deltas worldwide, Nienhuis et al. (2020) also found net land gain. This underlines the need to better understand the basic response of deltas to sea level rise and reduced sediment input. The semiempirical framework by Nienhuis et al. (2015, 2018, 2020) is a step forward in this respect, as it predicts delta response in terms of dominance of waves, tides, and river discharge in shaping the delta planform. This approach adds nuance to Q_s and k in equation (1), capturing delta buildup and decay governed by a variable river discharge, shoreline change by wave reworking, and tidal controls on channel dimensions, but it does not address sea level rise. Reduced-complexity models are potential tools to investigate the role of sea level rise (e.g., van der Wegen, 2013). Sea level rise is associated with time scales exceeding equilibrium time scales, as discussed in section 3.1. Such delta-scale models can provide boundary conditions for realistic models that can capture the topographic detail that is needed to anticipate the impacts of sea level rise and reduced sediment supply on delta resilience against extreme events and maintenance needs.

4.3. Synergy Between Approaches and Cross-Links Between Disciplines

At a scientific community level, the main challenge is to combine approaches and create cross-links between disciplines. Figure 6 illustrates how synergy can be achieved between field monitoring, high- and

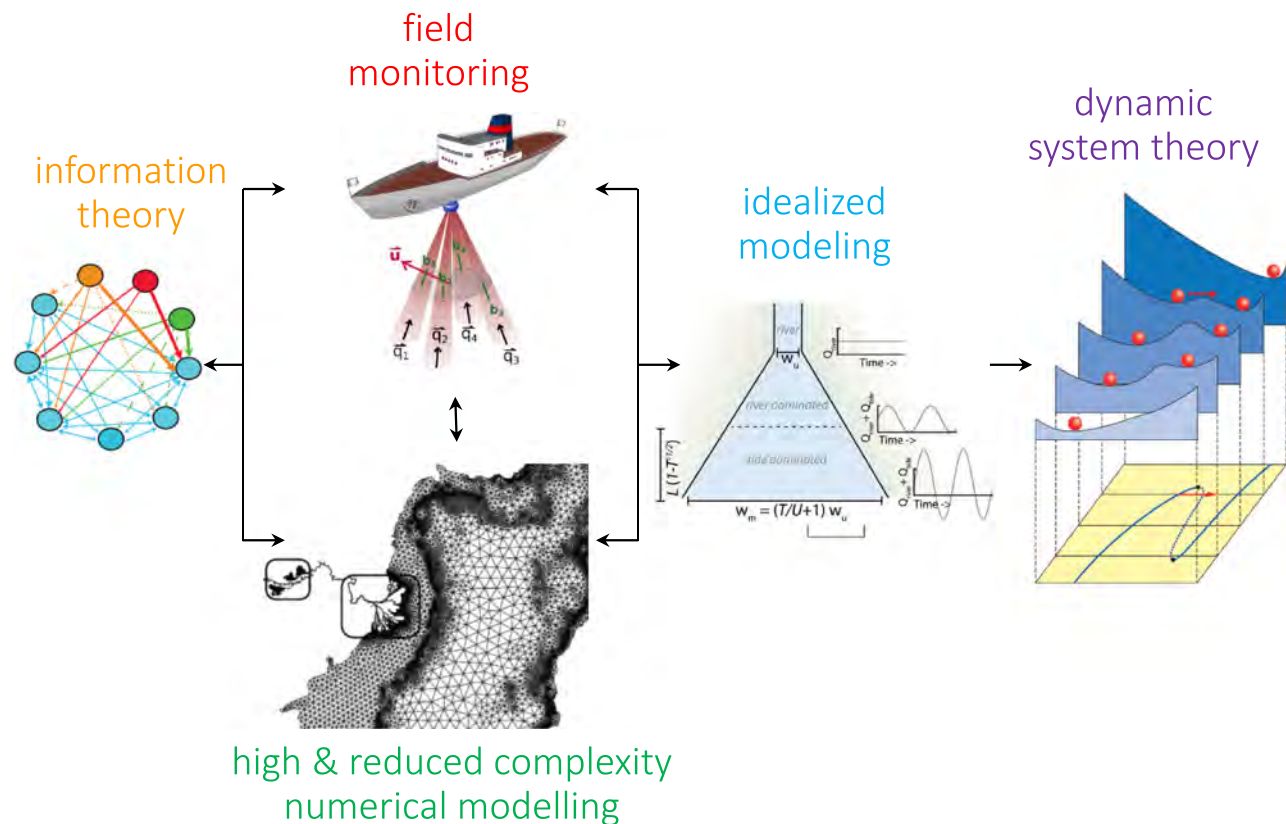


Figure 6. Synergy between alternative approaches to quantify morphodynamic stability of deltas. Field measurements are used to calibrate high-complexity models. In turn, modeling results help to optimize a monitoring plan. Information theory can be applied to test the degree in which high-complexity models correctly represent the information exchange between field stations in a delta. Using the collective understanding inferred from field observations and complex models, idealized or simplified models can be set up that capture basic mechanisms that can lead to instability. When the key mechanisms are understood, dynamic system theory can be employed to identify thresholds for regime shifts and to develop early warning indicators. Graphs obtained from Sendrowski and Passalacqua (2017) Sassi, Hoitink, de Brye, et al. (2011), Vermeulen et al. (2014), Nienhuis et al. (2018), and Scheffer (2009).

reduced-complexity modeling, information theory, idealized modeling, and stability analysis. Comprehensive field data can be used to set up a detailed, realistic numerical model, which can represent the dynamics of a specific delta. Such numerical models can be used to optimize a field monitoring program and be analyzed and validated using techniques available from information theory. The collective understanding from field observations and high- or reduced-complexity models can inform the development of idealized models that capture the essential mechanisms of delta morphodynamic change. Idealized models are less computationally intensive, which allows for the exploration of a much larger domain of the parameter space. When an idealized model has been established that captures the nonlinear feedbacks in a morphodynamic system that includes critical transitions as described in section 3.5 on DST, it may be possible to identify early warning indicators for an abrupt change in sedimentary regime, based on variables that are being monitored continuously, such as water levels and discharges.

A contemporary, realistic representation of delta morphodynamic change includes the role of anthropogenic and ecological influences, which are still underrepresented in morphodynamic models developed by earth scientists, civil engineers, and physical oceanographers. This requires the disciplinary input from ecologists and landscape architects. Deltas have evolved over centuries as a geological unit in the landscape but now fulfill a vast number of ecosystem services including shipping, agriculture, and biodiversity reserves, which act as constraints to the system. Humans are capable of safeguarding those ecosystem services. Successful interdisciplinary collaboration is therefore needed, which requires common sources of data, accessible and understandable to all communities involved. Terminology has to be uniform. Social scientists play an increasingly important role in coupling the natural and human aspects in delta systems. For an effective interface between delta science and delta management, research efforts have to become not only interdisciplinary but also transdisciplinary, that is, involving stakeholders. With the involvement of different

disciplines, the narrow interpretation of resilience we adopt here can become more general. Interventions have become part of the morphologic equilibrium of deltas. Typically, a natural morphodynamic equilibrium no longer exists, and because of continuous interventions, deltas will not reach morphodynamic equilibrium as long as human interventions take place. Human occupation of deltas and the loss of pristine conditions cause a lack of in situ views on natural, robust delta systems that have evolved over centuries. When seeking nature-based solutions to create delta resilience, a fundamental understanding of morphodynamic equilibrium conditions remains essential. The last near-pristine systems on the globe need to be cherished and analyzed, because they may reveal unknown mechanisms of resilience (Kästner & Hoitink, 2019). Besides those, the stratigraphic record provides an abundant archive of pristine delta behavior, which should further be explored to discover unknown natural mechanisms of morphological resilience.

Acknowledgments

A. J. F. H. was funded by the Netherlands Organisation for Scientific Research (NWO), within Vici project “Deltas out of shape: regime changes of sediment dynamics in tide-influenced deltas” (Grant NWO-TTW 17062). Travel funding for J. A. N. was provided by Wageningen Institute for Environment and Climate Research (WIMEK). J. A. N. acknowledges support from the National Science Foundation (NSF) EAR-1427262 Coastal SEES grant. J. B. S. acknowledges extensive input from Kelly Sanks and Kyle Straub on section 4.2 and support from NSF Grant EAR-1848993. P. P. acknowledges support from NSF Grants EAR-1350336, OCE-1600222, and EAR-1719670. We thank Prof. Chris Poala, two anonymous reviewers, and the Editors for constructive feedback on the draft of this manuscript. This is a synthesis paper for which no new data were generated.

References

- Aberle, J., & Järvelä, J. (2013). Flow resistance of emergent rigid and flexible floodplain vegetation. *Journal of Hydraulic Research*, 51(1), 33–45.
- Alam, M. (1996). Subsidence of the Ganges Brahmaputra Delta of Bangladesh and associated drainage, sedimentation and salinity problems. In J. D. Milliman, & B. Haq (Eds.), *Sea level rise and coastal subsidence* (pp. 169–192). Dordrecht, Netherlands: Springer. <https://doi.org/10.1007/978-94-015-8719-89>
- Allen, G. P., Salomon, J., Bassoullet, P., Du Penhoat, Y., & De Grandpre, C. (1980). Effects of tides on mixing and suspended sediment transport in macrotidal estuaries. *Sedimentary Geology*, 26(1–3), 69–90.
- Alpers, W., Campbell, G., Wensink, H., & Zhang, Q. (2004). Underwater topography. In C. R. Jackson & J. R. Appel (Eds.), *Synthetic aperture radar marine user's manual* (pp. 245–262). Camp Springs, MD: NOAA/NESDIS Office of Research and Applications.
- Alpers, W., & Hennings, I. (1984). A theory of the imaging mechanism of underwater bottom topography by real and synthetic aperture radar. *Journal of Geophysical Research*, 89(C6), 10,529–10,546.
- Anthony, E. J., Brunier, G., Besset, M., Goichot, M., Dussouillez, P., & Nguyen, V. L. (2015). Linking rapid erosion of the Mekong River delta to human activities. *Scientific Reports*, 5, 14745.
- Ashton, A., Murray, A., & Arnould, O. (2001). Formation of coastline features by large-scale instabilities induced by high-angle waves. *Nature*, 414, 296–300. <https://doi.org/10.1038/35104541>
- Auerbach, L., Goodbred, S. Jr., Mondal, D., Wilson, C., Ahmed, K., Roy, K., et al. (2015). Flood risk of natural and embanked landscapes on the Ganges-Brahmaputra tidal delta plain. *Nature Climate Change*, 5(2), 153–157.
- Bain, R. L., Hale, R. P., & Goodbred, S. L. (2019). Flow reorganization in an anthropogenically modified tidal channel network: An example from the southwestern ganges-brahmaputra-meghna delta. *Journal of Geophysical Research: Earth Surface*, 124, 2141–2159. <https://doi.org/10.1029/2018JF004996>
- Besset, M., Anthony, E. J., & Bouchette, F. (2019). Multi-decadal variations in delta shorelines and their relationship to river sediment supply: An assessment and review. *Earth-Science Reviews*, 193, 199–219. <https://doi.org/10.1016/j.earscirev.2019.04.018>
- Blum, M. D., & Roberts, H. H. (2009). Drowning of the mississippi delta due to insufficient sediment supply and global sea-level rise. *Nature Geoscience*, 2(7), 488–491.
- Bohacs, K., & Suter, J. (1997). Sequence stratigraphic distribution of coaly rocks: Fundamental controls and paralic examples. *AAPG Bulletin*, 81(10), 1612–1639.
- Bolla Pittaluga, M., Tambroni, N., Canestrelli, A., Slingerland, R., Lanzoni, S., & Seminara, G. (2015). Where river and tide meet: The morphodynamic equilibrium of alluvial estuaries. *Journal of Geophysical Research: Earth Surface*, 120, 75–94. <https://doi.org/10.1002/2014JF003233>
- Brakenridge, G. R., Syvitski, J. P. M., Overeem, I., Higgins, S. A., Kettner, A. J., Stewart-Moore, J. A., & Westerhoff, R. (2013). Global mapping of storm surges and the assessment of coastal vulnerability. *Natural Hazards*, 66(3), 1295–1312. <https://doi.org/10.1007/s11069-012-0317-z>
- Brock, J. C., & Purkis, S. J. (2009). The emerging role of lidar remote sensing in coastal research and resource management. *Journal of Coastal Research*, 10053, 1–5.
- Buschman, F., Hoitink, A., De Jong, S., Hoekstra, P., Hidayat, H., & Sassi, M. (2012). Suspended sediment load in the tidal zone of an Indonesian river. *Hydrology and Earth System Sciences*, 16, 4191–4204.
- Buschman, F. A., Hoitink, A. J. F., Van Der Vegt, M., & Hoekstra, P. (2010). Subtidal flow division at a shallow tidal junction. *Water Resources Research*, 46, W12515. <https://doi.org/10.1029/2010WR009266>
- Buschman, F. A., Vegt, M. V. D., Hoitink, A. J. F., & Hoekstra, P. (2013). Water and suspended sediment division at a stratified tidal junction. *Journal of Geophysical Research: Oceans*, 118, 1459–1472. <https://doi.org/10.1002/jgrc.20124>
- Caldwell, R. L., Edmonds, D. A., Baumgardner, S., Paola, C., Roy, S., & Nienhuis, J. H. (2019). A global delta dataset and the environmental variables that predict delta formation. *Earth Surface Dynamics*, 7(3), 773–787.
- Calkoen, C. J., Hesselmanns, G. H. F. M., Wensink, G. J., & Vogelzang, J. (2001). The Bathymetry Assessment System: Efficient depth mapping in shallow seas using radar images. *International Journal of Remote Sensing*, 22(15), 2973–2998.
- Canestrelli, A., Lanzoni, S., & Fagherazzi, S. (2014). One-dimensional numerical modeling of the long-term morphodynamic evolution of a tidally-dominated estuary: The lower fly river (papua new guinea). *Sedimentary Geology*, 301, 107–119.
- Castagno, K. A., Jiménez-Robles, A. M., Donnelly, J. P., Wiberg, P. L., Fenster, M. S., & Fagherazzi, S. (2018). Intense storms increase the stability of tidal bays. *Geophysical Research Letters*, 45, 5491–5500. <https://doi.org/10.1029/2018GL078208>
- Cathcart, C., Shaw, J., & Amos, M. (2020). Validation of streaklines as recorders of synoptic flow direction in a deltaic setting. *Remote Sensing*, 12(1), 148.
- Chadwick, A., Lamb, M., Moodie, A., Parker, G., & Nittrouer, J. (2019). Origin of a preferential avulsion node on lowland river deltas. *Geophysical Research Letters*, 46, 4267–4277. <https://doi.org/10.1029/2019GL082491>
- Chatanantavet, P., Lamb, M. P., & Nittrouer, J. A. (2012). Backwater controls of avulsion location on deltas. *Geophysical Research Letters*, 39, L01402. <https://doi.org/10.1029/2011GL050197>
- Chu, Z., Sun, X., Zhai, S., & Xu, K. (2006). Changing pattern of accretion/erosion of the modern Yellow River (Huanghe) subaerial delta, China: Based on remote sensing images. *Marine Geology*, 227(1), 13–30.

- Coco, G., & Murray, A. B. (2007). Patterns in the sand: From forcing templates to self-organization. *Geomorphology*, 91(3-4), 271–290.
- Couper, P. R. (2004). Space and time in river bank erosion research: A review. *Area*, 36(4), 387–403.
- Couper, P. R., & Maddock, I. P. (2001). Subaerial river bank erosion processes and their interaction with other bank erosion mechanisms on the River Arrow, Warwickshire, UK. *Earth Surface Processes and Landforms: The Journal of the British Geomorphological Research Group*, 26(6), 631–646.
- Couvillion, B. R., Beck, H., Schoolmaster, D., & Fischer, M. (2017). Land area change in coastal Louisiana (1932 to 2016) (USGS Numbered Series No. 3381): Reston, VA: U.S. Geological Survey. (IP-085820).
- Dai, L., Korolev, K. S., & Gore, J. (2013). Slower recovery in space before collapse of connected populations. *Nature*, 496(7445), 355–358.
- Darby, S. E., Rinaldi, M., & Dapporto, S. (2007). Coupled simulations of fluvial erosion and mass wasting for cohesive river banks. *Journal of Geophysical Research*, 112, F03022. <https://doi.org/10.1029/2006JF000722>
- De Nijs, M. A., Winterwerp, J. C., & Pietrzak, J. D. (2009). On harbour siltation in the fresh-salt water mixing region. *Continental Shelf Research*, 29(1), 175–193.
- De Vriend, H. J., Wang, Z. B., Ysebaert, T., Herman, P. M., & Ding, P. (2011). Eco-morphological problems in the Yangtze Estuary and the western Scheldt. *Wetlands*, 31(6), 1033–1042.
- Dijkstra, Y. M., Schuttelaars, H. M., & Schramkowski, G. P. (2019a). Can the Scheldt River estuary become hyperturbid? *Ocean Dynamics*, 69(7), 1–19.
- Dijkstra, Y. M., Schuttelaars, H. M., & Schramkowski, G. P. (2019b). A regime shift from low to high sediment concentrations in a tide-dominated estuary. *Geophysical Research Letters*, 46, 4338–4345. <https://doi.org/10.1029/2019GL082302>
- Dijkstra, Y. M., Schuttelaars, H. M., Schramkowski, G. P., & Brouwer, R. L. (2019). Modeling the transition to high sediment concentrations as a response to channel deepening in the EMS river estuary. *Journal of Geophysical Research: Oceans*, 124, 1578–1594. <https://doi.org/10.1029/2018JC014367>
- Dijkstra, Y. M., Schuttelaars, H. M., & Winterwerp, J. C. (2018). The hyperturbid state of the water column in estuaries and rivers: the importance of hindered settling. *Ocean Dynamics*, 68(3), 377–389.
- Donchyts, G., Baart, F., Winsemius, H., Gorelick, N., Kwadijk, J., & van de Giesen, N. (2016). Earths surface water change over the past 30 years. *Nature Climate Change*, 6, 810–813. <https://doi.org/10.1038/nclimate3111>
- Dong, T. Y., Nittrouer, J. A., Ill'icheva, E., Pavlov, M., McElroy, B., Czapiaga, M. J., et al. (2016). Controls on gravel termination in seven distributary channels of the Selenga River Delta, Baikal Rift basin, Russia. *GSA Bulletin*, 128(7-8), 1297–1312.
- Edmonds, D. A., & Slingerland, R. L. (2008). Stability of delta distributary networks and their bifurcations. *Water Resources Research*, 44, W09426. <https://doi.org/10.1029/2008WR006699>
- Edmonds, D. A., & Slingerland, R. L. (2009). Significant effect of sediment cohesion on delta morphology. *Nature Geoscience*, 3(2), 105–109.
- Eekhout, J. P. C., Fraaije, R. G. A., & Houtink, A. J. F. (2014). Morphodynamic regime change in a reconstructed lowland stream. *Earth Surface Dynamics*, 2(1), 279–293.
- Eidam, E. F., Nittrouer, C. A., Ogston, A. S., DeMaster, D. J., Liu, J. P., Nguyen, T. T., & Nguyen, T. N. (2017). Dynamic controls on shallow clinoform geometry: Mekong Delta, Vietnam. *Continental Shelf Research*, 147, 165–181.
- Eidam, E. F., Ogston, A. S., & Nittrouer, C. A. (2019). Formation and removal of a coastal flood deposit. *Journal of Geophysical Research: Oceans*, 124, 1045–1062. <https://doi.org/10.1029/2018JC014360>
- Engelund, F., & Hansen, E. (1967). A monograph on sediment transport in alluvial streams. Copenhagen K: Technical University of Denmark Østervoldgade 10.
- Erban, L. E., Gorelick, S. M., & Zebker, H. A. (2014). Groundwater extraction, land subsidence, and sea-level rise in the Mekong Delta, Vietnam. *Environmental Research Letters*, 9(8), 84,010.
- Fagherazzi, S. (2008). Self-organization of tidal deltas. *Proceedings of the National Academy of Sciences*, 105(48), 18,692–18,695.
- Fagherazzi, S., Edmonds, D. A., Nardin, W., Leonardi, N., Canestrelli, A., Falcini, F., et al. (2015). Dynamics of river mouth deposits. *Reviews of Geophysics*, 53, 642–672. <https://doi.org/10.1002/2014RG000451>
- Fagherazzi, S., Kirwan, M. L., Mudd, S. M., Guntenspergen, G. R., Temmerman, S., D'Alpaos, A., et al. (2012). Numerical models of salt marsh evolution: Ecological, geomorphic, and climatic factors. *Reviews of Geophysics*, 50, RG1002. <https://doi.org/10.1029/2011RG000359>
- Falcini, F., Khan, N. S., Macelloni, L., Horton, B. P., Lutken, C. B., McKee, K. L., et al. (2012). Linking the historic 2011 Mississippi River flood to coastal wetland sedimentation. *Nature Geoscience*, 5(11), 803–807.
- Fan, H., Huang, H., Zeng, T. Q., & Wang, K. (2006). River mouth bar formation, riverbed aggradation and channel migration in the modern Huanghe (Yellow) River delta, China. *Geomorphology*, 74(1), 124–136.
- Ferrari, A., Dazzi, S., Vacondio, R., & Mignosa, P. (2020). Enhancing the resilience to flooding induced by levee breaches in lowland areas: A methodology based on numerical modelling. *Natural Hazards and Earth System Sciences*, 20(1), 59–72.
- Fu, L.-L., & Holt, B. (1982). SEASAT views oceans and sea ice with synthetic-aperture radar. Pasadena, CA: Jet Propulsion Laboratory.
- Galloway, W. E. (1975). Deltas: Models for exploration. In M. L. Broussard (Ed.) (pp. 87–98). Houston, TX: Houston Geological Society.
- Ganju, N. K., Defne, Z., Kirwan, M. L., Fagherazzi, S., D'Alpaos, A., & Carniello, L. (2017). Spatially integrative metrics reveal hidden vulnerability of microtidal salt marshes. *Nature Communications*, 8, 14,156.
- Ganti, V., Chadwick, A. J., Hassenruck-Gudipati, H. J., Fuller, B. M., & Lamb, M. P. (2016). Experimental river delta size set by multiple floods and backwater hydrodynamics. *Science Advances*, 2(5), e1501768.
- Ganti, V., Chu, Z., Lamb, M. P., Nittrouer, J. A., & Parker, G. (2014). Testing morphodynamic controls on the location and frequency of river avulsions on fans versus deltas: Huanghe (Yellow River), China. *Geophysical Research Letters*, 41, 7882–7890. <https://doi.org/10.1002/2014GL061918>
- Gao, J. (2009). Bathymetric mapping by means of remote sensing: Methods, accuracy and limitations. *Progress in Physical Geography*, 33(1), 103–116.
- Gaweesh, A., & Meselhe, E. (2016). Evaluation of sediment diversion design attributes and their impact on the capture efficiency. *Journal of Hydraulic Engineering*, 142(5), 4016002.
- Geleynse, N., Hiatt, M., Sangireddy, H., & Passalacqua, P. (2015). Identifying environmental controls on the shoreline of a natural river delta. *Journal of Geophysical Research: Earth Surface*, 120, 877–893. <https://doi.org/10.1002/2014JF003408>
- Giosan, L., Constantinescu, S., Filip, F., & Deng, B. (2013). Maintenance of large deltas through channelization: Nature vs. humans in the Danube delta. *Anthropocene*, 1, 35–45.
- Goodwell, A. E., & Kumar, P. (2017a). Temporal information partitioning: Characterizing synergy, uniqueness, and redundancy in interacting environmental variables. *Water Resources Research*, 53, 5920–5942. <https://doi.org/10.1002/2016WR020216>
- Goodwell, A. E., & Kumar, P. (2017b). Temporal information partitioning networks (tipnets): A process network approach to infer ecohydrologic shifts. *Water Resources Research*, 53, 5899–5919. <https://doi.org/10.1002/2016WR020216>

- Gouw, M. J. P. (2008). Alluvial architecture of the Holocene Rhine-Meuse delta (the Netherlands). *Sedimentology*, 55(5), 1487–1516.
- Guo, L., Van der Wegen, M., Roelvink, J., & He, Q. (2014). The role of river flow and tidal asymmetry on 1-D estuarine morphodynamics. *Journal of Geophysical Research: Earth Surface*, 119, 2315–2334. <https://doi.org/10.1002/2014JF003110>
- Hackney, C., Best, J., Leyland, J., Darby, S. E., Parsons, D., Aalto, R., & Nicholas, A. (2015). Modulation of outer bank erosion by slump blocks: Disentangling the protective and destructive role of failed material on the three-dimensional flow structure. *Geophysical Research Letters*, 42, 10,663–10,670. <https://doi.org/10.1002/2015GL066481>
- Hajek, E., Edmonds, D., Millard, C., Toms, L., & Fogaren, C. (2012). Records of transient avulsion-related river patterns in ancient deposits: Evidence for different styles of channel-floodplain coupling. In *Agu fall meeting abstracts*. San Francisco, CA.
- Hale, R. P., Bain, R., Goodbred Jr., S., & Best, J. (2019). Observations and scaling of tidal mass transport across the lower Ganges-Brahmaputra delta plain: implications for delta management and sustainability. *Earth Surface Dynamics*, 7(1), 231–245.
- Hale, R. P., Ogston, A. S., Walsh, J. P., & Orpin, A. R. (2014). Sediment transport and event deposition on the Waipaoa River Shelf, New Zealand. *Continental Shelf Research*, 34, 52–65.
- Hansen, D. V., & Rattray Jr., M. (1966). Gravitational circulation in straits and estuaries. *Journal of Marine Research*, 23, 104–122.
- Harrison, S. R., Bryan, K. R., & Mullarney, J. C. (2017). Observations of morphological change at an ebb-tidal delta. *Marine Geology*, 385, 131–145.
- Heath, R. E., Brown, G. L., Little, C. D., Pratt, T. C., Ratcliff, J. J., Abraham, D. D., et al. (2015). Old river control complex sedimentation investigation. Engineer research and development center Vicksburg MS Coastal and Hydraulics Laboratory.
- Hennings, I. (1998). An historical overview of radar imagery of sea bottom topography. *International Journal of Remote Sensing*, 19(7), 1447–1454.
- Hensel, P. E., Day, J. W., & Pont, D. (1999). Wetland vertical accretion and soil elevation change in the Rhone River delta, France: The importance of riverine flooding. *Journal of Coastal Research*, 15(3), 668–681.
- Hiatt, M., & Passalacqua, P. (2015). Hydrological connectivity in river deltas: The first-order importance of channel-island exchange. *Water Resources Research*, 51, 2264–2282. <https://doi.org/10.1002/2014WR016149>
- Hibma, A., De Vriend, H. J., & Stive, M. J. F. (2003). Numerical modelling of shoal pattern formation in well-mixed elongated estuaries. *Estuarine, Coastal and Shelf Science*, 57(5), 981–991.
- Higgins, S. A., Overeem, I., Steckler, M. S., Syvitski, J. P. M., Seeber, L., & Akhter, S. H. (2014). InSAR measurements of compaction and subsidence in the Ganges-Brahmaputra Delta, Bangladesh. *Journal of Geophysical Research: Earth Surface*, 119, 1768–1781. <https://doi.org/10.1002/2014JF003117>
- Hoitink, A. J. F., Wang, Z. B., Vermeulen, B., Huismans, Y., & Kästner, K. (2017). Tidal controls on river delta morphology. *Nature geoscience*, 10(9), 637.
- Holmquist, J. R., Windham-Myers, L., Bliss, N., Crooks, S., Morris, J. T., Megonigal, J. P., et al. (2018). Accuracy and precision of tidal wetland soil carbon mapping in the conterminous United States. *Scientific Reports*, 8(1), 1–16.
- Hope, M. E., Westerink, J. J., Kennedy, A. B., Kerr, P., Dietrich, J. C., Dawson, C., et al. (2013). Hindcast and validation of Hurricane Ike (2008) waves, forerunner, and storm surge. *Journal of Geophysical Research: Oceans*, 118, 4424–4460. <https://doi.org/10.1002/jgrc.20314>
- Hopkinson, L., & Wynn, T. (2009). Vegetation impacts on near bank flow. *Ecology: Ecosystems, Land and Water Process Interactions, Ecohydrogeomorphology*, 2(4), 404–418.
- Huismans, Y., Van Velzen, G., O'Mahony, T. S. D., Hoffmans, G. J. C. M., & Wiersma, A. P. (2016). Scour hole development in river beds with mixed sand-clay-peat stratigraphy. In *Icse conference 2016*, Oxford UK.
- Ibáñez, C., Sharpe, P. J., Day, J. W., Day, J. N., & Prat, N. (2010). Vertical accretion and relative sea level rise in the Ebro delta wetlands (Catalonia, Spain). *Wetlands*, 30(5), 979–988.
- Isikdogan, F., Bovik, A. C., & Passalacqua, P. (2015). Automatic analysis of channel networks on remotely sensed images by singularity analysis. *IEEE Geoscience and Remote Sensing Letters*, 99, 1–4. <https://doi.org/10.1109/LGRS.2015.2458898>
- Isikdogan, F., Bovik, A. C., & Passalacqua, P. (2017). RivaMap: An automated river analysis and mapping engine. *Remote Sensing of Environment*, 202, 88–97. <https://doi.org/10.1016/j.rse.2017.03.044>
- Isikdogan, F., Bovik, A. C., & Passalacqua, P. (2017). Surface water mapping by deep learning. *IEEE Journal of Selected Topics in Applied Earth Observations and Remote Sensing*, 10(11), 4909–4918. <https://doi.org/10.1109/JSTARS.2017.2735443>
- Isikdogan, F., Bovik, A. C., & Passalacqua, P. (2018). Learning a river network extractor using an adaptive loss function. *IEEE Geoscience and Remote Sensing Letters*, 15(6), 813–817. <https://doi.org/10.1109/LGRS.2018.2811754>
- Islam, M. F., Bhattacharya, B., & Popescu, I. (2019). Flood risk assessment due to cyclone-induced dike breaching in coastal areas of Bangladesh. *Natural Hazards and Earth System Sciences*, 19(2), 353–368.
- Jankowski, K. L., Törnqvist, T. E., & Fernandes, A. M. (2017). Vulnerability of Louisiana's coastal wetlands to present-day rates of relative sea-level rise. *Nature Communications*, 8, 14,792.
- Jaramillo, S., Sheremet, A., Allison, M. A., Reed, A. H., & Holland, K. T. (2009). Wave-mud interactions over the muddy Atchafalaya subaqueous clinoform, Louisiana, United States: Wave-supported sediment transport. *Journal of Geophysical Research*, 114, C04002. <https://doi.org/10.1029/2008JC004821>
- Jarriel, T., Isikdogan, L. F., Bovik, A., & Passalacqua, P. (2019). Characterization of deltaic channel morphodynamics from imagery time series using the channelized response variance. *Journal of Geophysical Research: Earth Surface*, 124, 3022–3042. <https://doi.org/10.1029/2019JF005118>
- Jerolmack, D. J. (2009). Conceptual framework for assessing the response of delta channel networks to holocene sea level rise. *Quaternary Science Reviews*, 28(17–18), 1786–1800.
- Jerolmack, D. J., & Mohrig, D. (2007). Conditions for branching in depositional rivers. *Geology*, 35(5), 463–466.
- Kästner, K., & Hoitink, A. J. F. (2019). Flow and suspended sediment division at two highly asymmetric bifurcations in a river delta: Implications for channel stability. *Journal of Geophysical Research: Earth Surface*, 124, 2358–2380. <https://doi.org/10.1029/2018JF004994>
- Kästner, K., Hoitink, A. J. F., Torfs, P. J. J. F., Deleersnijder, E., & Ningsih, N. S. (2019). Propagation of tides along a river with a sloping bed. *Journal of Fluid Mechanics*, 872, 39–73.
- Kästner, K., Hoitink, A. J. F., Torfs, P. J. J. F., Vermeulen, B., Ningsih, N. S., & Pramulya, M. (2018). Prerequisites for accurate monitoring of river discharge based on fixed-location velocity measurements. *Water Resources Research*, 54, 1058–1076. <https://doi.org/10.1002/2017WR020990>
- Kéfi, S., Guttal, V., Brock, W. A., Carpenter, S. R., Ellison, A. M., Livina, V. N., et al. (2014). Early warning signals of ecological transitions: Methods for spatial patterns. *PloS one*, 9(3), e92097.
- Kéfi, S., Rietkerk, M., Alados, C. L., Pueyo, Y., Papanastasis, V. P., ElAich, A., & De Ruiter, P. C. (2007). Spatial vegetation patterns and imminent desertification in mediterranean arid ecosystems. *Nature*, 449(7159), 213–217.

- Kenney, M. A., Hobbs, B. F., Mohrig, D., Huang, H., Nittrouer, J. A., Kim, W., & Parker, G. (2013). Cost analysis of water and sediment diversions to optimize land building in the Mississippi River delta. *Water Resources Research*, 49, 3388–3405. <https://doi.org/10.1002/wrcr.20139>
- Keogh, M. E., & Törnqvist, T. E. (2019). Measuring rates of present-day relative sea-level rise in low-elevation coastal zones: A critical evaluation. *Ocean Science*, 15(1), 61–73.
- Khan, N. S., Horton, B. P., McKee, K. L., Jerolmack, D., Falcini, F., Enache, M. D., & Vane, C. H. (2013). Tracking sedimentation from the historic A. D. 2011 Mississippi River flood in the deltaic wetlands of Louisiana, USA. *Geology*, 41(4), 391–394.
- Kim, W., Mohrig, D., Twilley, R., Paola, C., & Parker, G. (2009). Is it feasible to build new land in the Mississippi River delta. *EOS American Geophysical Union Transactions*, 90(42), 373–374.
- Klösch, M., Blamauer, B., & Habersack, H. (2009). Monitoring geometry and timing of riverbank failures during flood events, 33rd IAHR Congress, 9–14 August 2009 (pp. 1–8). Vancouver, BC, Canada.
- Klösch, M., Blamauer, B., & Habersack, H. (2015). Intra-event scale bar–bank interactions and their role in channel widening. *Earth Surface Processes and Landforms*, 40(11), 1506–1523.
- Klema, V. (2013). Remote sensing of emergent and submerged wetlands: An overview. *International Journal of Remote Sensing*, 34(18), 6286–6320.
- Kondolf, G. M., Rubin, Z. K., & Minear, J. T. (2014). Dams on the Mekong: Cumulative sediment starvation. *Water Resources Research*, 50, 5158–5169. <https://doi.org/10.1002/2013WR014651>
- Konsoer, K. M. (2014). Influence of riparian vegetation on near-bank flow structure and rates of erosion on a large meandering river (Ph.D. Thesis).
- Konsoer, K. M., Rhoads, B., Best, J., Langendoen, E., Ursic, M., Abad, J., & Garcia, M. (2017). Length scales and statistical characteristics of outer bank roughness for large elongate meander bends: The influence of bank material properties, floodplain vegetation and flow inundation. *Earth Surface Processes and Landforms*, 42(13), 2024–2037.
- Konsoer, K. M., Rhoads, B. L., Langendoen, E. J., Best, J. L., Ursic, M. E., Abad, J. D., & Garcia, M. H. (2016). Spatial variability in bank resistance to erosion on a large meandering, mixed bedrock-alluvial river. *Geomorphology*, 252, 80–97.
- Kosters, E. C., Chmura, G. L., & Bailey, A. (1987). Sedimentary and botanical factors influencing peat accumulation in the Mississippi Delta. *Journal of the Geological Society*, 144(3), 423–434.
- Kraus, M. J. (1996). Avulsion deposits in lower eocene alluvial rocks, bighorn basin, wyoming. *Journal of Sedimentary Research*, 66(2), 354–363.
- Kummu, M., Lu, X., Wang, J., & Varis, O. (2010). Basin-wide sediment trapping efficiency of emerging reservoirs along the mekong. *Geomorphology*, 119(3–4), 181–197.
- Langendoen, E. J., Mendoza, A., Abad, J. D., Tassi, P., Wang, D., Ata, R., et al. (2016). Improved numerical modeling of morphodynamics of rivers with steep banks. *Advances in Water Resources*, 93, 4–14.
- Langendoen, E. J., & Simon, A. (2008). Modeling the evolution of incised streams. II: Streambank erosion. *Journal of Hydraulic Engineering*, 134(7), 905–915.
- Lawler, D. M. (1993). The measurement of river bank erosion and lateral channel change: A review. *Earth Surface Processes and Landforms*, 18(9), 777–821.
- Lazarus, E. D., & Goldstein, E. B. (2019). Is there a bulldozer in your model? *Journal of Geophysical Research: Earth Surface*, 124, 696–699. <https://doi.org/10.1029/2018JF004957>
- Lentsch, N., Finotello, A., & Paola, C. (2018). Reduction of deltaic channel mobility by tidal action under rising relative sea level. *Geology*, 46(7), 599–602.
- Leyland, J., Darby, S. E., Teruggi, L., Rinaldi, M., & Ostuni, D. (2015). A self-limiting bank erosion mechanism? Inferring temporal variations in bank form and skin drag from high resolution topographic data. *Earth Surface Processes and Landforms*, 40(12), 1600–1615.
- Liang, M., Geleynse, N., Edmonds, D. A., & Passalacqua, P. (2015). A reduced-complexity model for river delta formation—Part II: Assessment of the flow routing scheme. *Earth Surface Dynamics*, 3, 87–104. <https://doi.org/10.5194/esurf-3-87-2015>
- Liang, M., Kim, W., & Passalacqua, P. (2016). How much subsidence is enough to change the morphology of river deltas? *Geophysical Research Letters*, 43, 10,266–10,276. <https://doi.org/10.1002/2016GL070519>
- Liang, M., Van Dyk, C., & Passalacqua, P. (2016). Quantifying the response of river deltas to relative sea-level rise—Assessment and application of a reduced-complexity model. *Journal of Geophysical Research: Earth Surface*, 121, 465–496. <https://doi.org/10.1002/2015JF003653>
- Liang, M., Voller, V. R., & Paola, C. (2015). A reduced-complexity model for river delta formation—Part I: Modeling deltas with channel dynamics. *Earth Surface Dynamics*, 3, 67–86. <https://doi.org/10.5194/esurf-3-67-2015>
- Lorenzo-Trueba, J., Voller, V. R., Paola, C., Twilley, R. R., & Bevington, A. E. (2012). Exploring the role of organic matter accumulation on delta evolution. *Journal of Geophysical Research*, 117, F00A02. <https://doi.org/10.1029/2012JF002339>
- Luo, X.-L., Zeng, E. Y., Ji, R.-Y., & Wang, C.-P. (2007). Effects of in-channel sand excavation on the hydrology of the Pearl River Delta, China. *Journal of Hydrology*, 343(3), 230–239.
- Luppi, L., Rinaldi, M., Teruggi, L. B., Darby, S. E., & Nardi, L. (2009). Monitoring and numerical modelling of riverbank erosion processes: A case study along the Cecina River (central Italy). *Earth Surface Processes and Landforms*, 34(4), 530–546.
- Ma, H., Nittrouer, J. A., Naito, K., Fu, X., Zhang, Y., Moodie, A. J., et al. (2017). The exceptional sediment load of fine-grained dispersal systems: Example of the Yellow River, China. *Science advances*, 3(5), e1603114.
- Ma, H., Nittrouer, J. A., Wu, B., Lamb, M. P., Zhang, Y., Mohrig, D., et al. (2020). Universal relation with regime transition for sediment transport in fine-grained rivers. *Proceedings of the National Academy of Sciences of the United States of America*, 117(1), 171–176. <https://doi.org/10.1073/pnas.1911225116>
- Maestre, F. T., & Escudero, A. (2009). Is the patch size distribution of vegetation a suitable indicator of desertification processes? *Ecology*, 90(7), 1729–1735.
- Mahalanobis, P. C. (1927). Report on rainfall and floods in North Bengal 18701922: Govt of Bengal Irrigation Dept. Calcutta.
- Maloney, J. M., Bentley, S. J., Xu, K., Obelcz, J., Georgiou, I. Y., & Miner, M. D. (2018). Mississippi River subaqueous delta is entering a stage of retrogradation. *Marine Geology*, 400, 12–23.
- Marani, M., D'Alpaos, A., Lanzoni, S., Carniello, L., & Rinaldo, A. (2010). The importance of being coupled: Stable states and catastrophic shifts in tidal biomorphodynamics. *Journal of Geophysical Research*, 115, F04004. <https://doi.org/10.1029/2009JF001600>
- Marani, M., Da Lio, C., & D'Alpaos, A. (2013). Vegetation engineers marsh morphology through multiple competing stable states. *Proceedings of the National Academy of Sciences*, 110(9), 3259–3263.
- Marciano, R., Wang, Z. B., Hibma, A., de Vriend, H. J., & Defina, A. (2005). Modeling of channel patterns in short tidal basins. *Journal of Geophysical Research*, 110, F01001. <https://doi.org/10.1029/2003JF000092>

- Mariotti, G., & Fagherazzi, S. (2013). Critical width of tidal flats triggers marsh collapse in the absence of sea-level rise. *Proceedings of the national Academy of Sciences*, 110(14), 5353–5356.
- Mehta, A. J. (2013). *An introduction to hydraulics of fine sediment transport* (Vol. 38). Singapore: World Scientific Publishing Company.
- Mohrig, D., Heller, P. L., Paola, C., & Lyons, W. J. (2000). Interpreting avulsion process from ancient alluvial sequences: Guadalupe-Matarranya system (Northern Spain) and Wasatch formation (Western Colorado). *Geological Society of America Bulletin*, 112(12), 1787–1803.
- Moodie, A. J., Nitttrouer, J. A., Ma, H., Carlson, B. N., Chadwick, A. J., Lamb, M. P., & Parker, G. (2019). Modeling deltaic lobe-building cycles and channel avulsions for the Yellow River Delta, China. *Journal of Geophysical Research: Earth Surface*, 124, 2438–2462. <https://doi.org/10.1029/2019JF005201>
- Mossa, J. (2016). The changing geomorphology of the Atchafalaya River, Louisiana: A historical perspective. *Geomorphology*, 252, 112–127.
- Motta, D., Abad, J. D., Langendoen, E. J., & Garcia, M. H. (2012). The effects of floodplain soil heterogeneity on meander planform shape. *Water Resources Research*, 48, W09518. <https://doi.org/10.1029/2011WR011601>
- Mukerjee, R. (1938). *The changing face of bengal: A study in riverine economy*. Calcutta: University of Calcutta.
- Nardin, W., & Edmonds, D. A. (2014). Optimum vegetation height and density for inorganic sedimentation in deltaic marshes. *Nature Geoscience*, 7(10), 722.
- Nardin, W., Edmonds, D. A., & Fagherazzi, S. (2016). Influence of vegetation on spatial patterns of sediment deposition in deltaic islands during flood. *Advances in Water Resources*, 93, Part B, 236–248.
- Nardin, W., & Fagherazzi, S. (2012). The effect of wind waves on the development of river mouth bars. *Geophysical Research Letters*, 39, L12607. <https://doi.org/10.1029/2012GL051788>
- Nardin, W., Mariotti, G., Edmonds, D., Guercio, R., & Fagherazzi, S. (2013). Growth of river mouth bars in sheltered bays in the presence of frontal waves. *Journal of Geophysical Research: Earth Surface*, 118, 872–886. <https://doi.org/10.1002/jgrf.20057>
- Nepf, H. M. (2012). Hydrodynamics of vegetated channels. *Journal of Hydraulic Research*, 50(3), 262–279.
- Nienhuis, J. H., Ashton, A. D., Edmonds, D. A., Hoitink, A. J. F., Kettner, A. J., Rowland, J. C., & Törnqvist, T. E. (2020). Global-scale human impact on delta morphology has led to net land area gain. *Nature*, 577, 514–518.
- Nienhuis, J. H., Ashton, A. D., & Giosan, L. (2015). What makes a delta wave-dominated? *Geology*, 43(6), 511–514.
- Nienhuis, J. H., Hoitink, A. J. F., & Törnqvist, T. E. (2018). Future change to tide-influenced deltas. *Geophysical Research Letters*, 45, 3499–3507. <https://doi.org/10.1029/2018GL077638>
- Nitttrouer, J. A. (2013). Backwater hydrodynamics and sediment transport in the lowermost mississippi river delta: Implications for the development of fluvial-deltaic landforms in a large lowland river. *Deltas: Landforms, Ecosystems, and Human Activities: International Association of Hydrological Sciences Publication*, 358, 48–61.
- Nitttrouer, J. A., Best, J. L., Brantley, C., Cash, R. W., Czapiga, M., Kumar, P., & Parker, G. (2012). Mitigating land loss in coastal louisiana by controlled diversion of mississippi river sand. *Nature Geoscience*, 5(8), 534–537.
- Nitttrouer, J. A., Mohrig, D., Allison, M. A., & Peyret, A. P. B. (2011). The lowermost Mississippi River: A mixed bedrock-alluvial channel. *Sedimentology*, 58, 1914–1934. <https://doi.org/10.1111/j.1365-3091.2011.01245.x>
- Olliver, E. A., & Edmonds, D. A. (2017). Defining the ecogeomorphic succession of land building for freshwater, intertidal wetlands in Wax Lake Delta, Louisiana. *Estuarine, Coastal and Shelf Science*, 196, 45–57.
- Paola, C., & Mohrig, D. (1996). Palaeohydraulics revisited: Palaeoslope estimation in coarse-grained braided rivers. *Basin Research*, 8(3), 243–254.
- Paola, C., Twilley, R., Edmonds, D., Kim, W., Mohrig, D., Parker, G., et al. (2011). Natural processes in delta restoration: Application to the mississippi delta. *Annual Review of Marine Science*, 3, 67–91.
- Papanicolaou, A. N., Dey, S., Rinaldi, M., & Mazumdar, A. (2006). Research issues for riverine bank stability analysis in the 21st century (IIHR Technical Report No. 457): College of Engineering, University of Iowa. IIHR-Hydroscience and Engineering.
- Parker, G., Shimizu, Y., Wilkerson, G., Eke, E. C., Abad, J. D., Lauer, J., et al. (2011). A new framework for modeling the migration of meandering rivers. *Earth Surface Processes and Landforms*, 36(1), 70–86.
- Passalacqua, P. (2017). The Delta Connectome: A network-based framework for studying connectivity in river deltas. *Geomorphology*, 277, 50–62. <https://doi.org/10.1016/j.geomorph.2016.04.001>
- Passalacqua, P., Belmont, P., Staley, D. M., Simley, J. D., Arrowsmith, J. R., Bode, C. A., et al. (2015). Analyzing high resolution topography for advancing the understanding of mass and energy transfer through landscapes: A review. *Earth-Science Reviews*, 148, 174–193.
- Passalacqua, P., Lanzoni, S., Paola, C., & Rinaldo, A. (2013). Geomorphic signatures of deltaic processes and vegetation: The ganges-brahmaputra-jamuna case study. *Journal of Geophysical Research: Earth Surface*, 118, 1838–1849. <https://doi.org/10.1002/jgrf.20128>
- Pekel, J.-F., Cottam, A., Gorelick, N., & Belward, A. S. (2016). High-resolution mapping of global surface water and its long-term changes. *Nature*, 540, 418–422. <https://doi.org/10.1038/nature20584>
- Pethick, J., & Orford, J. D. (2013). Rapid rise in effective sea-level in southwest Bangladesh: Its causes and contemporary rates. *Global and Planetary Change*, 111, 237–245. <https://doi.org/10.1016/j.gloplacha.2013.09.019>
- Pilarczyk, K. W. (2004). Bank erosion Mekong Delta and Red River. Delft: HYDROpil Consultancy.
- Pritchard, D., Roberts, G., White, N., & Richardson, C. (2009). Uplift histories from river profiles. *Geophysical Research Letters*, 36, L24301. <https://doi.org/10.1029/2009GL040928>
- Reitz, M. D., Jerolmack, D. J., & Swenson, J. B. (2010). Flooding and flow path selection on alluvial fans and deltas. *Geophysical Research Letters*, 37, L06401. <https://doi.org/10.1029/2009GL041985>
- Rinaldi, M., & Nardi, L. (2013). Modeling interactions between riverbank hydrology and mass failures. *Journal of Hydrologic Engineering*, 18(10), 1231–1240.
- Ritchie, A. C., Warrick, J. A., East, A. E., Magirl, C. S., Stevens, A. W., Bountry, J. A., et al. (2018). Morphodynamic evolution following sediment release from the world's largest dam removal. *Scientific Reports*, 8, 13,279.
- Rodriguez-Iturbe, I., & Rinaldo, A. (2001). *Fractal river basins: Chance and self-organization*. Cambridge, UK: Cambridge University Press.
- Rogers, K. G., Goodbred, S. L., & Mondal, D. R. (2013). Monsoon sedimentation on the 'abandoned' tide-influenced Ganges-Brahmaputra delta plain. *Estuarine, Coastal and Shelf Science*, 131, 297–309.
- Salter, G., Paola, C., & Voller, V. R. (2018). Control of delta avulsion by downstream sediment sinks. *Journal of Geophysical Research: Earth Surface*, 123, 142–166. <https://doi.org/10.1002/2017JF004350>
- Sanchez-Arcilla, A., Jimenez, J. A., & Valdemoro, H. I. (1998). The Ebro Delta: Morphodynamics and vulnerability. *Journal of Coastal Research*, 755–772.
- Sanford, L. P., & Maa, J. P.-Y. (2001). A unified erosion formulation for fine sediments. *Marine Geology*, 179(1-2), 9–23.

- Sassi, M. G., Hoitink, A. J. F., de Brye, B., Vermeulen, B., & Deleersnijder, E. (2011). Tidal impact on the division of river discharge over distributary channels in the Mahakam Delta. *Ocean Dynamics*, 61(12), 2211–2228.
- Sassi, M. G., Hoitink, A. J. F., & Vermeulen, B. (2011). Discharge estimation from H-ADCP measurements in a tidal river subject to sidewall effects and a mobile bed. *Water Resources Research*, 47, W06504. <https://doi.org/10.1029/2010WR009972>
- Scheffer, M. (2009). *Critical transitions in nature and society* (Vol. 16). Princeton, NJ: Princeton University Press.
- Scheffer, M., Bascompte, J., Brock, W. A., Brovkin, V., Carpenter, S. R., Dakos, V., et al. (2009). Early-warning signals for critical transitions. *Nature*, 461(7260), 53.
- Schmitt, R., Rubin, Z., & Kondolf, G. (2017). Losing ground-scenarios of land loss as consequence of shifting sediment budgets in the Mekong Delta. *Geomorphology*, 294, 58–69.
- Schumm, S. A., Harvey, M. D., & Watson, C. C. (1984). *Incised channels: Morphology, dynamics, and control*. Littleton, CO: Water Resources Publications.
- Schuttelaars, H. M., de Jonge, V. N., & Chernetsky, A. (2013). Improving the predictive power when modelling physical effects of human interventions in estuarine systems. *Ocean and Coastal Management*, 72(2), 70–82.
- Schuurman, F., Marra, W. A., & Kleinhans, M. G. (2013). Physics-based modeling of large braided sand-bed rivers: Bar pattern formation, dynamics, and sensitivity. *Journal of Geophysical Research: Earth Surface*, 118, 2509–2527. <https://doi.org/10.1002/2013JF002896>
- Sendrowski, A., & Passalacqua, P. (2017). Process connectivity in a naturally prograding river delta. *Water Resources Research*, 53, 1841–1863. <https://doi.org/10.1002/2016WR019768>
- Sendrowski, A., Sadid, K., Meselhe, E., Wagner, R. W., Mohrig, D., & Passalacqua, P. (2018). Transfer entropy as a tool for hydrodynamic model validation. *Entropy*, 20, 58. <https://doi.org/10.3390/e20010058>
- Shannon, C. E. (1948). A mathematical theory of communication. *The Bell System Technical Journal*, 27, 379–423.
- Shaw, J. B., Ayoub, F., Jones, C. E., Lamb, M. P., Holt, B., Wagner, R. W., et al. (2016). Airborne radar imaging of subaqueous channel evolution in Wax Lake Delta, Louisiana, USA. *Geophysical Research Letters*, 43, 5035–5042. <https://doi.org/10.1002/2016GL068770>
- Shaw, J. B., Estep, J. D., Whaling, A. R., Sanks, K. M., & Edmonds, D. A. (2018). Measuring subaqueous progradation of the Wax Lake Delta with a model of flow direction divergence. *Earth Surface Dynamics*, 6(4), 1155–1168.
- Shaw, J. B., & Mohrig, D. (2014). The importance of erosion in distributary channel network growth, Wax Lake Delta, Louisiana, USA. *Geology*, 42(1), 31–34.
- Shaw, J. B., Mohrig, D., & Wagner, R. W. (2016). Flow patterns and morphology of a prograding river delta. *Journal of Geophysical Research: Earth Surface*, 121, 372–391. <https://doi.org/10.1002/2015JF003570>
- Slingerland, R., & Smith, N. D. (2004). River avulsions and their deposits. *Annual Review of Earth and Planetary Sciences*, 32, 257–285.
- Sloff, C. J., Van Spijk, A., Stouthamer, E., & Sieben, A. S. (2013). Understanding and managing the morphology of branches incising into sand-clay deposits in the Dutch Rhine Delta. *International Journal of Sediment Research*, 28(2), 127–138.
- Stanley, D. J., & Warne, A. G. (1993). Nile delta: Recent geological evolution and human impact. *Science*, 260, 628–628.
- Straub, K. M., Li, Q., & Benson, W. M. (2015). Influence of sediment cohesion on deltaic shoreline dynamics and bulk sediment retention: A laboratory study. *Geophysical Research Letters*, 42, 9808–9815. <https://doi.org/10.1002/2015GL066131>
- Strogatz, S. H. (2018). *Nonlinear dynamics and chaos: With applications to physics, biology, chemistry, and engineering*. Boca Raton, FL: CRC Press.
- Syvitski, J. P., Kettner, A. J., Overeem, I., Hutton, E. W., Hannon, M. T., Brakenridge, G. R., et al. (2009). Sinking deltas due to human activities. *Nature Geoscience*, 2(10), 681–686.
- Syvitski, J. P., & Saito, Y. (2007). Morphodynamics of deltas under the influence of humans. *Global and Planetary Change*, 57(3), 261–282.
- Syvitski, J. P., Vörösmarty, C. J., Kettner, A. J., & Green, P. (2005). Impact of humans on the flux of terrestrial sediment to the global coastal ocean. *Science*, 308(5720), 376–380.
- Talke, S. A., de Swart, H. E., & Schuttelaars, H. (2009). Feedback between residual circulations and sediment distribution in highly turbid estuaries: An analytical model. *Continental Shelf Research*, 29(1), 119–135.
- Tejedor, A., Longjas, A., Caldwell, R., Edmonds, D. A., Zaliapin, I., & Fofoula-Georgiou, E. (2016). Quantifying the signature of sediment composition on the topologic and dynamic complexity of river delta channel networks and inferences toward delta classification. *Geophysical Research Letters*, 43, 3280–3287. <https://doi.org/10.1002/2016GL068210>
- Tejedor, A., Longjas, A., Edmonds, D. A., Zaliapin, I., Georgiou, T. T., Rinaldo, A., & Fofoula-Georgiou, E. (2017). Entropy and optimality in river deltas. *Proceedings of the National Academy of Sciences*, 114(44), 11,651–11,656. <https://doi.org/10.1073/pnas.1708404114>
- Tejedor, A., Longjas, A., Passalacqua, P., Moreno, Y., & Fofoula-Georgiou, E. (2018). River deltas as multiplex networks: A framework for studying multi-process multi-scale connectivity via coupled-network theory. *Geophysical Research Letters*, 45, 9681–9689. <https://doi.org/10.1029/2018GL078355>
- Tejedor, A., Longjas, A., Zaliapin, I., & Fofoula-Georgiou, E. (2015a). Delta channel networks. 1: A graph-theoretic approach for studying connectivity and steady state transport on deltaic surfaces. *Water Resources Research*, 51, 3998–4018. <https://doi.org/10.1002/2014WR016577>
- Tejedor, A., Longjas, A., Zaliapin, I., & Fofoula-Georgiou, E. (2015b). Delta channel networks. 2: Metrics of topologic and dynamic complexity for delta comparison, physical inference, and vulnerability assessment. *Water Resources Research*, 51, 3998–4018. <https://doi.org/10.1002/2014WR016577>
- Temmerman, S., Bouma, T., Govers, G., Wang, Z. B., De Vries, M., & Herman, P. (2005). Impact of vegetation on flow routing and sedimentation patterns: Three-dimensional modeling for a tidal marsh. *Journal of Geophysical Research*, 110, F04019. <https://doi.org/10.1029/2005JF000301>
- Temmerman, S., & Kirwan, M. L. (2015). Building land with a rising sea. *Science*, 349, 588–589. <https://doi.org/10.1126/science.aac8312>
- Tessler, Z. D., Vörösmarty, C. J., Grossberg, M., Gladkova, I., Aizenman, H., Syvitski, J. P. M., & Fofoula-Georgiou, E. (2015). Profiling risk and sustainability in coastal deltas of the world. *Science*, 349, 638–643. <https://doi.org/10.1126/science.aab3574>
- Thorne, C. (1982). Processes and mechanisms of river bank erosion. In R. D. Hey, J. C. Bathurst, & C. R. Thorne (Eds.), *Gravel-bed rivers: Fluvial Processes, Engineering and Management* (pp. 227–271). Hoboken, NJ: Wiley-Interscience Publication.
- Thorne, C., Alonso, C., Borah, D., Darby, S., Diplas, P., Julien, P., et al. (1998a). River width adjustment. I: Processes and mechanisms. *Journal of Hydraulic Engineering*, 124(9), 881–902. ASCE Task Committee on Hydraul., Bank Mech., and Model. of River Width Adjust.
- Thorne, C., Alonso, C., Borah, D., Darby, S., Diplas, P., Julien, P., et al. (1998b). River width adjustment. II: Modeling. *Journal of Hydraulic Engineering*, 124(9), 903–917. ASCE Task Committee on Hydraul., Bank Mech., and Model. of River Width Adjust.
- Vörösmarty, C., Meybeck, M., Fekete, B., Green, P., & Syvitski, J. P. M. (2009). Anthropogenic sediment retention: Major global impact from registered river impoundments. *Global and Planetary Change*, 39(10), 169–190.
- van Maren, D. S. (2007). Grain size and sediment concentration effects on channel patterns of silt-laden rivers. *Sedimentary Geology*, 202(1–2), 297–317.

- van Maren, D. S., & Cronin, K. (2016). Uncertainty in complex three-dimensional sediment transport models: Equifinality in a model application of the EMS estuary, the Netherlands. *Ocean Dynamics*, 66(12), 1665–1679.
- van Maren, D. S., Winterwerp, J. C., & Vroom, J. (2015). Fine sediment transport into the hyper-turbid lower EMS river: The role of channel deepening and sediment-induced drag reduction. *Ocean Dynamics*, 65(4), 589–605.
- van Staveren, M. F., Warner, J. F., & Shah Alam Khan, M. (2017). Bringing in the tides: From closing down to opening up delta polders via tidal river management in the southwest delta of Bangladesh. *Water Policy*, 19(1), 147–164.
- van der Deijl, E. C., van der Perk, M., & Middelkoop, H. (2019). Pathways of water and sediment in the Biesbosch freshwater tidal wetland. *Wetlands*, 39(1), 197–215.
- van der Wegen, M. (2013). Numerical modeling of the impact of sea level rise on tidal basin morphodynamics. *Journal of Geophysical Research: Earth Surface*, 118, 447–460. <https://doi.org/10.1002/jgrf.20034>
- Van der Wegen, M., & Roelvink, J. A. (2008). Long-term morphodynamic evolution of a tidal embayment using a two-dimensional, process-based model. *Journal of Geophysical Research*, 113, C03016. <https://doi.org/10.1029/2006JC003983>
- Vellinga, N. E., Hoitink, A. J. F., van der Vegt, M., Zhang, W., & Hoekstra, P. (2014). Human impacts on tides overwhelm the effect of sea level rise on extreme water levels in the Rhine–Meuse Delta. *Coastal Engineering*, 90, 40–50.
- Vermeulen, B., Sassi, M. G., & Hoitink, A. J. F. (2014). Improved flow velocity estimates from moving-boat ADCP measurements. *Water resources research*, 50, 4186–4196. <https://doi.org/10.1002/2013WR015152>
- Vinh, V. D., Ouillon, S., Thanh, T. D., & Chu, L. (2014). Impact of the Hoa Binh dam (Vietnam) on water and sediment budgets in the Red River basin and delta. *Hydrology and Earth System Sciences*, 18(10), 3987–4005.
- Vogelzang, J. (1997). Mapping submarine sand waves with multiband imaging radar: 1. Model development and sensitivity analysis. *Journal of Geophysical Research*, 102(C1), 1163–1181.
- Wagner, R. W., Lague, D., Mohrig, D., Passalacqua, P., Shaw, J. B., & Moffett, K. (2017). Elevation change and stability on a prograding delta. *Geophysical Research Letters*, 44, 1786–1794. <https://doi.org/10.1002/2016GL072070>
- Walker, J., Arnborg, L., & Peippo, J. (1987). Riverbank erosion in the Colville Delta, Alaska. *Geografiska Annaler: Series A, Physical Geography*, 69(1), 61–70.
- Walker, N. D., & Hammack, A. B. (2000). Impacts of winter storms on circulation and sediment transport: Atchafalaya–Vermilion Bay region, Louisiana, USA. *Journal of Coastal Research*, 16, 996–1010.
- Warner, J. F., van Staveren, M. F., & van Tatenhove, J. (2018). Cutting dikes, cutting ties? Reintroducing flood dynamics in coastal polders in Bangladesh and the Netherlands. *International Journal of Disaster Risk Reduction*, 32, 106–112.
- Wedding, L. M., Friedlander, A. M., McGranaghan, M., Yost, R. S., & Monaco, M. E. (2008). Using bathymetric lidar to define nearshore benthic habitat complexity: Implications for management of reef fish assemblages in Hawaii. *Remote Sensing of Environment*, 112(11), 4159–4165.
- Wesselink, A., Warner, J., Syed, M. A., Chan, F., Tran, D. D., Huq, H., et al. (2015). Trends in flood risk management in deltas around the world: Are we going 'soft'. *International Journal of Water Governance*, 3(4), 25–46.
- Williams, C. A. (1919). *History of the rivers in the Gangetic Delta, 1750–1918*. Calcutta: Bengal Secretariat Press.
- Wilson, S., & Fischetti, T. (2010). Coastline population trends in the United States: 1960 to 2008: U.S. Census Bureau.
- Wilson, C., & Goodbred, S. L. (2015). Construction and maintenance of the Ganges–Brahmaputra–Meghna Delta: Linking process, morphology, and stratigraphy. *Annual Review of Marine Science*, 7(1), 67–88.
- Wilson, C., Goodbred, S., Small, C., Gilligan, J., Sams, S., Mallick, B., & Hale, R. (2017). Widespread infilling of tidal channels and navigable waterways in the human-modified tidal delta plain of southwest Bangladesh. *Elementa—Science of the Anthropocene*, 5, 78.
- Winterwerp, J. C., & Wang, Z. B. (2013). Man-induced regime shifts in small estuaries? I: Theory. *Ocean Dynamics*, 63(11–12), 1279–1292.
- Winterwerp, J. C., Wang, Z. B., Van Braeckel, A., Van Holland, G., & Kösters, F. (2013). Man-induced regime shifts in small estuaries? II: A comparison of rivers. *Ocean Dynamics*, 63(11–12), 1293–1306.
- Wolstencroft, M., Shen, Z., Törnqvist, T. E., Milne, G. A., & Kulp, M. (2014). Understanding subsidence in the Mississippi Delta region due to sediment, ice, and ocean loading: Insights from geophysical modeling. *Journal of Geophysical Research: Solid Earth*, 119, 3838–3856. <https://doi.org/10.1002/2013JB010928>
- Wood, A. L., Simon, A., Downs, P. W., & Thorne, C. R. (2001). Bank-toe processes in incised channels: The role of apparent cohesion in the entrainment of failed bank materials. *Hydrological Processes*, 15(1), 39–61.
- Xia, L. (1998). Measurement of rapid agricultural land loss in the Pearl River Delta with the integration of remote sensing and GIS. *Environment and Planning B: Planning and Design*, 25(3), 447–461.
- Xie, D., Gao, S., Wang, Z. B., Pan, C., Wu, X., & Wang, Q. (2017). Morphodynamic modeling of a large inside sandbar and its dextral morphology in a convergent estuary: Qiantang estuary, China. *Journal of Geophysical Research: Earth Surface*, 122, 1553–1572. <https://doi.org/10.1002/2017JF004293>
- Xing, F., Syvitski, J. P., Kettner, A. J., Meselhe, E. A., Atkinson, J. H., & Khadka, A. K. (2017). Morphological responses of the Wax Lake Delta, Louisiana, to Hurricanes Rita. *Elementa—Science of the Anthropocene*, 5, 80.
- Zhang, W., Xu, Y., Hoitink, A. J. F., Sassi, M. G., Zheng, J., Chen, X., & Zhang, C. (2015). Morphological change in the Pearl River Delta, China. *Marine Geology*, 363, 202–219.